
7-22. Rear Frame (total replacement)

A: REMOVAL

• Overall view (Rear skirt, rear floor pan, rear side frame rear, rear quarter panel outer & inner, side sill inner rear and closing plate removal condition)

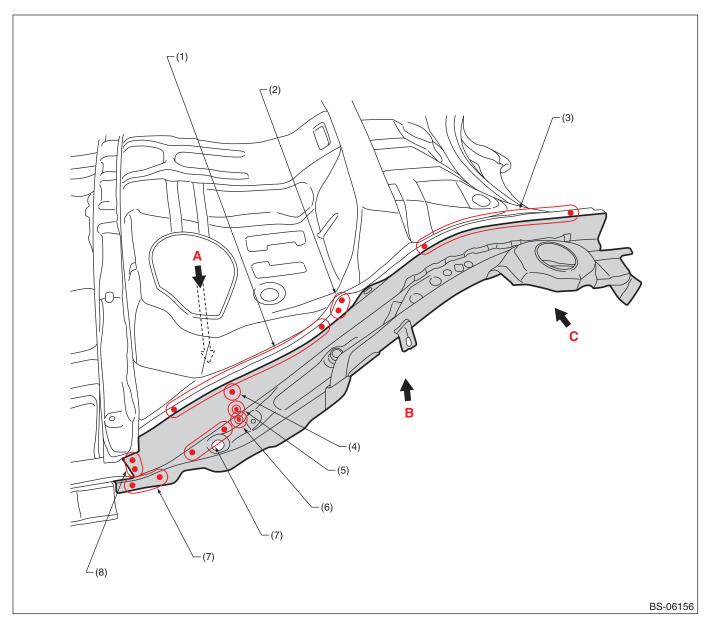


- (1) 6 points (top · 1)
- (2) 2 points (top · 1)
- (3) 8 points (top \cdot 1)

- (4) 1 point (outside · 1)
- (5) 1 point (outside \cdot 2)
- (6) 1 point (top · 2)

- (7) 3 points (top · 1)
- (8) 2 points (outside · 1)

Panel Replacement


• Views 1

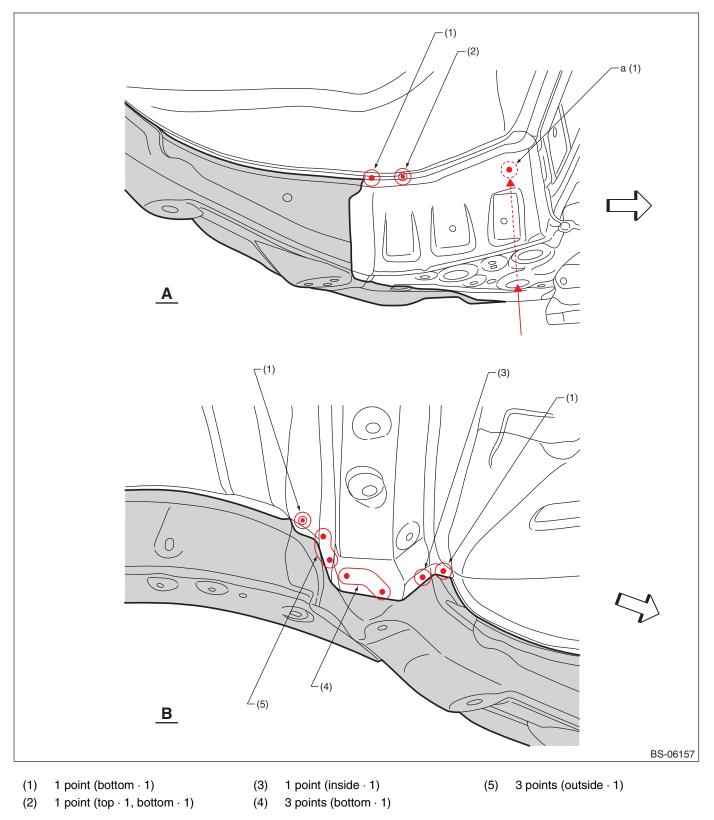

Note: Remove part "a" with a long spot cutter inserted through the hole indicated by the red arrow.

Panel Replacement

• Views 2

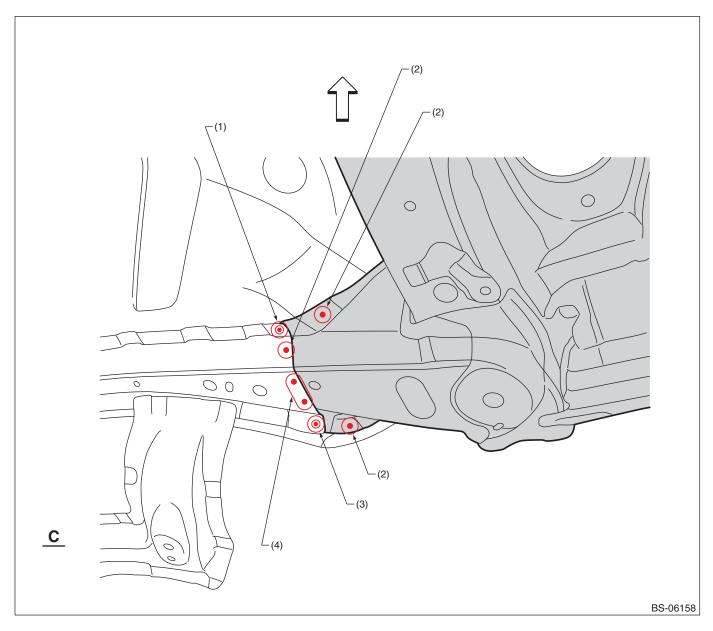

- (1) 1 point (top \cdot 1, bottom \cdot 1)
- 1 point (outside \cdot 1, inside \cdot 1) (4) 2 points (bottom \cdot 1) (3)

(2) 1 point (inside · 1)