

## 2. Headlight and Tail Light System

### A: SCHEMATIC

#### 1. HEADLIGHT

<Ref. to WI-102, SCHEMATIC, Headlight System.>

#### 2. CLEARANCE LIGHT AND ILLUMINATION LIGHT

<Ref. to WI-98, SCHEMATIC, Clearance Light and Illumination Light System.>


### B: INSPECTION

#### 1. HEADLIGHT RELAY


Measure the headlight relay resistance between terminals when connecting terminal No. 4 to battery positive terminal and terminal No. 3 to battery ground terminal.

#### 2. TAIL AND ILLUMINATION RELAY

Measure the tail and illumination relay resistance between terminals when connecting terminal No. 4 to battery positive terminal and terminal No. 3 to battery ground terminal.

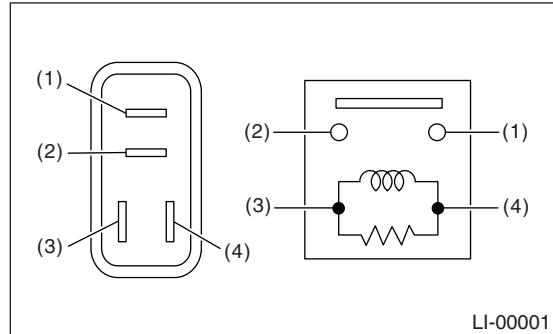

Current	Terminal No.	Standard
Flow	1 and 2	Less than 1Ω
		More than 1MΩ

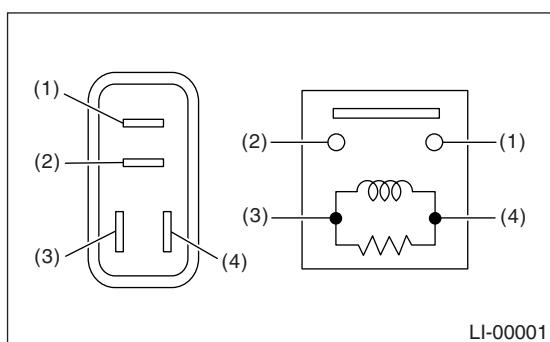

Current	Terminal No.	Standard
Flow	1 and 2	Less than 1Ω
		More than 1MΩ