

BACK-UP LIGHT SYSTEM

LIGHTING SYSTEM

5. Back-up Light System

A: SCHEMATIC


1. BACK-UP LIGHT

<Ref. to WI-97, SCHEMATIC, Back-up Light System. >

B: INSPECTION

1. BACK-UP LIGHT SWITCH (M/T)

Measure the back-up light switch resistance.

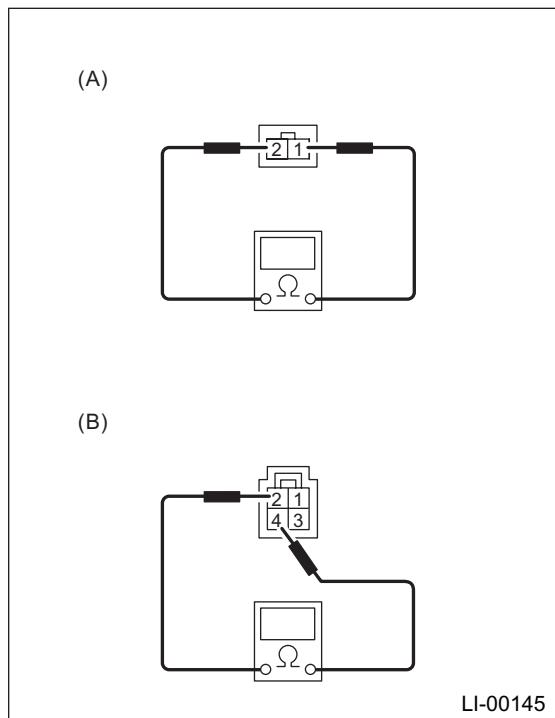


(A) Non-turbo model

(B) Turbo model

2. INHIBITOR SWITCH (A/T)

Measure the inhibitor switch resistance.

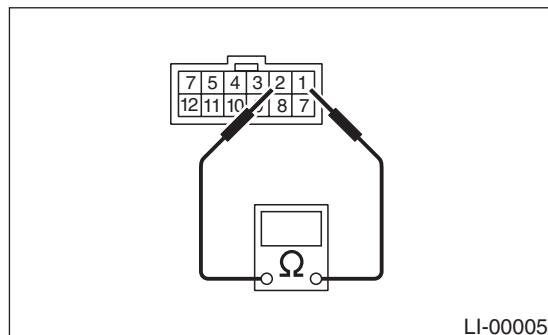

Switch position	Terminal No.	Standard
When select lever is set in "R" position	1 and 2	Less than 1Ω
Other positions		More than 1MΩ

Switch position	Terminal No.	Standard
When shift lever is set in reverse position	Turbo model: 2 and 4 Non-turbo model: 1 and 2	Less than 1Ω
Other positions		More than 1MΩ