

6. Stop Light System

A: SCHEMATIC


1. STOP LIGHT

<Ref. to WI-108, SCHEMATIC, Stop Light System. >

B: INSPECTION

1. STOP LIGHT SWITCH

Measure the stop light switch resistance.

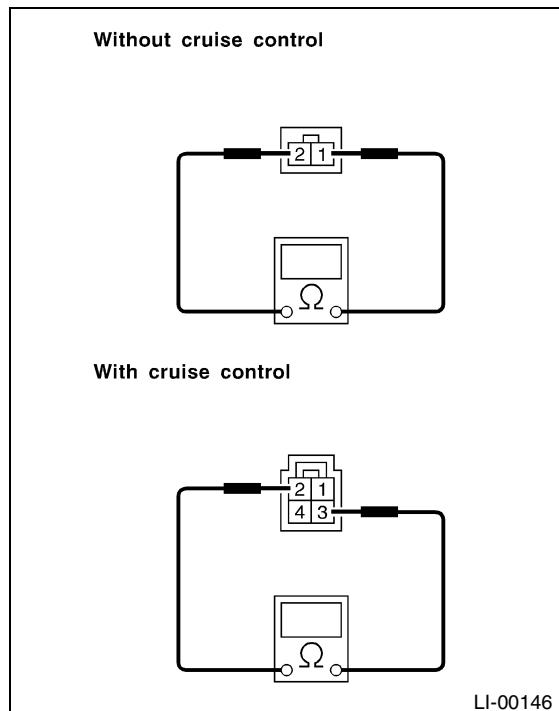

Switch position	Terminal No.	Standard
When brake pedal is depressed	1 and 2: Without cruise control 2 and 3: With cruise control	Less than 1Ω
When brake pedal is released		More than 1MΩ