

### 7. Interior Light System

#### A: SCHEMATIC


##### 1. INTERIOR LIGHT

<Ref. to WI-106, SCHEMATIC, In Compartment Light System. >

#### B: INSPECTION

##### 1. DOOR SWITCH

Measure the door switch resistance.

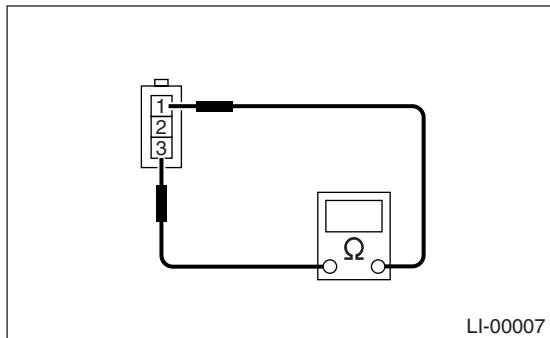

Switch position	Terminal No.	Standard
When door is opened	1 and 3	Less than 1Ω
When door is closed		More than 1MΩ

##### 2. REAR GATE LATCH SWITCH

Measure the rear gate latch switch resistance.

Switch position	Terminal No.	Standard
When rear gate is opened	1 and 2	Less than 1Ω
When rear gate is closed		More than 1MΩ

##### 3. TRUNK ROOM LIGHT SWITCH

Measure the trunk room light switch resistance.

Switch position	Terminal No.	Standard
When trunk lid is opened	1 and 2	Less than 1Ω
When trunk lid is closed		More than 1MΩ