

Back-up Light System

LIGHTING SYSTEM

6. Back-up Light System


A: WIRING DIAGRAM

Refer to "Back-up Light System" in WI section.
<Ref. to WI-100, WIRING DIAGRAM, Back-up Light System.>

B: INSPECTION

1. BACK-UP LIGHT SWITCH (MT MODEL)

Measure the resistance between the back-up light switch terminals.

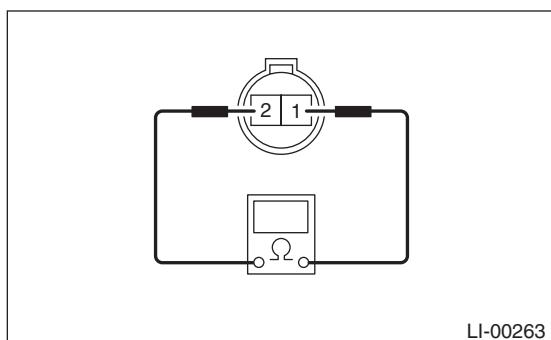


| Switch position | Terminal No. | Standard |
|---|--------------|---------------|
| When shift lever is set in reverse position | 1 and 2 | Less than 1 Ω |
| Other positions | | 1 MΩ or more |

Replace the back-up light switch if faulty.

2. INHIBITOR SWITCH (AT MODEL)

Measure the resistance between the inhibitor switch terminals.

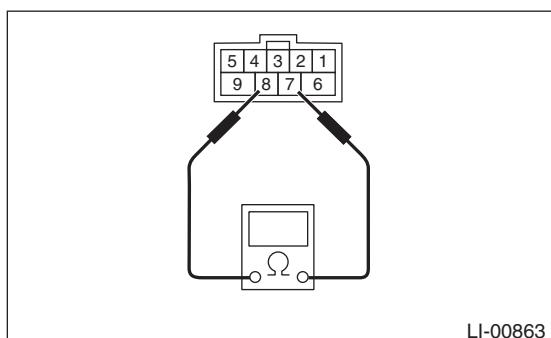

| Switch position | Terminal No. | Standard |
|---|--------------|---------------|
| When the selector lever is in the "R" range | 7 and 8 | Less than 1 Ω |
| Other positions | | 1 MΩ or more |

Replace the inhibitor switch if faulty.