

6. Back-up Light System


A: WIRING DIAGRAM

Refer to "Back-up Light System" in WI section.
<Ref. to WI-84, WIRING DIAGRAM, Back-up Light System.>

B: INSPECTION

1. BACK-UP LIGHT SWITCH (MT MODEL)

- 1) Measure the resistance between back-up light switch terminals.

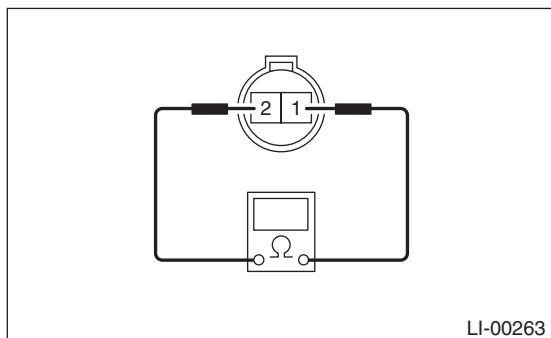


Switch position	Terminal No.	Standard
When shift lever is set in reverse position	1 and 2	Less than 1 Ω
Other positions		1 MΩ or more

- 2) Replace the back-up light switch if it is found defective.

2. INHIBITOR SWITCH (AT MODEL)

- 1) Measure the resistance between inhibitor switch terminals.

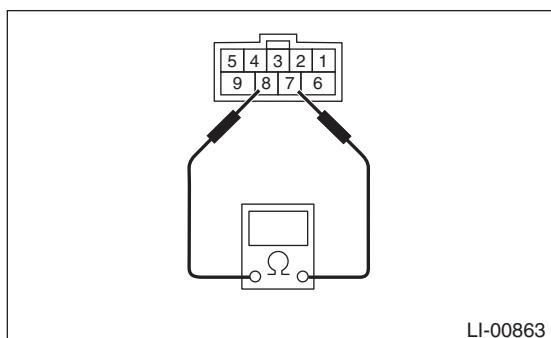

Switch position	Terminal No.	Standard
When the selector lever is in the "R" range	7 and 8	Less than 1 Ω
Other positions		1 MΩ or more

- 2) Replace the inhibitor switch if it is found defective.