

7. Stop Light System

A: WIRING DIAGRAM


Refer to "Stop Light System" in WI section. <Ref. to WI-85, WIRING DIAGRAM, Stop Light System.>

B: INSPECTION


1. STOP LIGHT SWITCH

1) Measure the resistance between stop light switch terminals.

- 5 door model

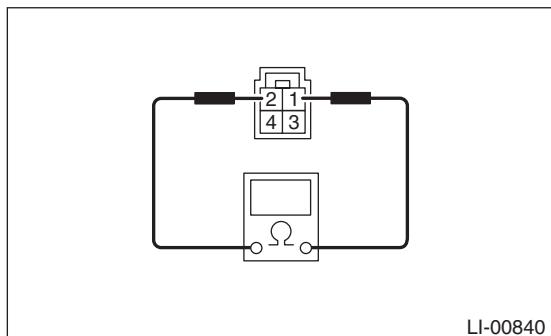

- 4 door model

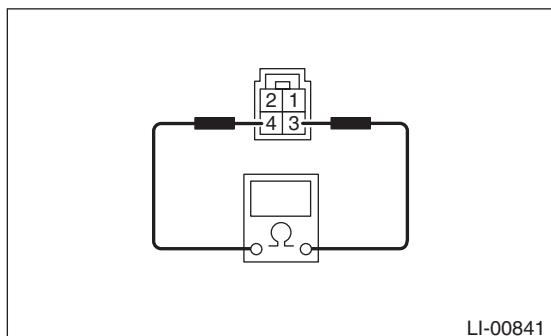

Switch position	Terminal No.	Standard
When brake pedal is depressed	5 door model: 1 and 2 4 door model: 3 and 4	Less than 1 Ω
When brake pedal is released		1 MΩ or more

2) Replace the stop light switch if it is found defective.