

7. Stop Light System

A: WIRING DIAGRAM


Refer to "Stop Light System" in WI section. <Ref. to WI-96, WIRING DIAGRAM, Stop Light System.>

B: INSPECTION


1. STOP LIGHT SWITCH

1) Measure the resistance between stop light switch terminals.

- 5 door model

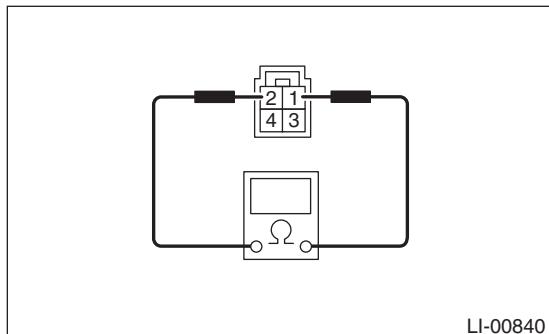

- 4 door model

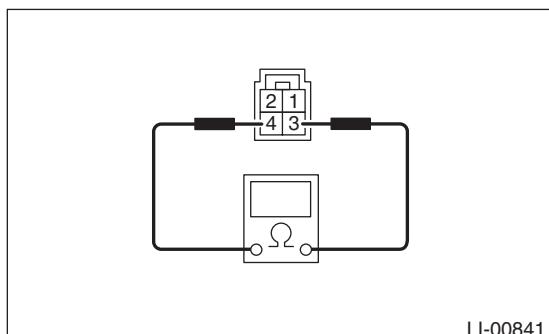

Switch position	Terminal No.	Specification
When brake pedal is depressed	5 door model: 1 and 2 4 door model: 3 and 4	Less than 1 Ω
When brake pedal is released		1 MΩ or more

2) Replace the stop light switch if the inspection result is not within the standard value.

C: NOTE

For operation procedures of each component of the stop light system, refer to the respective section.

- Rear combination light assembly: <Ref. to LI-25, Rear Combination Light Assembly.>
- Tail light/stop light bulb: <Ref. to LI-26, Tail/Stop Light Bulb.>
- High-mounted stop light: <Ref. to LI-32, High-mounted Stop Light.>