

## 8. Room Light System

### A: WIRING DIAGRAM


#### 1. ROOM LIGHT

<Ref. to WI-105, WIRING DIAGRAM, Interior Light System. >

### B: INSPECTION

#### 1. DOOR SWITCH


Measure the resistance between door switch terminals.

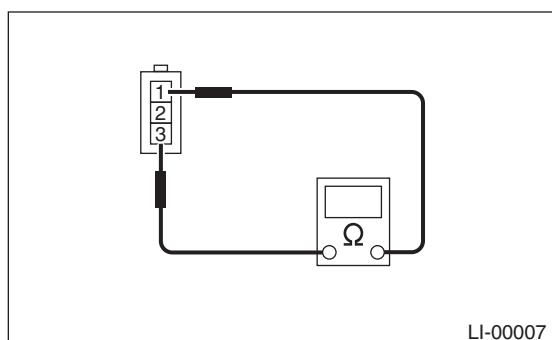

Switch position	Terminal No.	Standard
When door is opened	1 and 3	Less than 1 Ω
When door is closed		1 MΩ or more

#### 2. REAR GATE LATCH SWITCH

Measure the resistance between rear gate latch switch terminals.

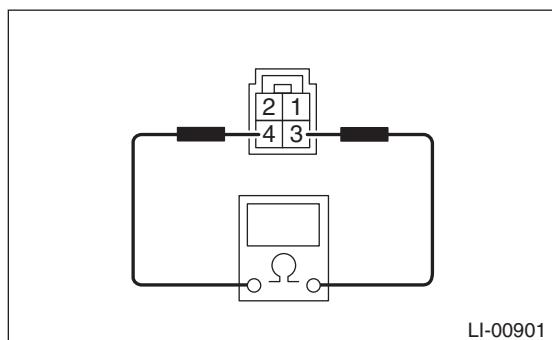

Switch position	Terminal No.	Standard
When rear gate is opened	3 and 4	Less than 1 Ω
When rear gate is closed		1 MΩ or more