

Engine & Cooling

Fuel

Ignition


Electrical

Running gear

Torque settings

Capacities

Notes & Illustrations

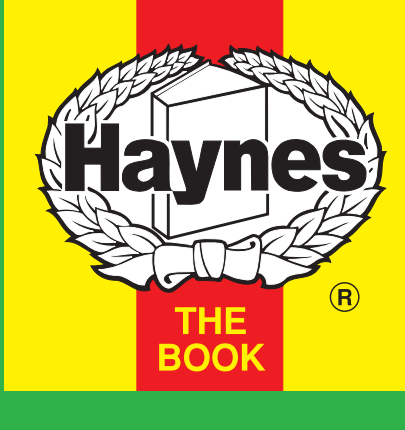

Automotive Technical
DATA BOOK

Click on one of the buttons above to view data for this car. To return to this screen and make another choice, click anywhere on the data screen.

MENU

HELP

Engine and cooling system

Uno Turbo ie 1.3 CAT

1989 to 1990

Type		146 A2.246 OHC US83
Capacity (cm³) / number of cylinders		1301 / 4
Compression ratio / pressure	bar	7.7 / _
Oil pressure	bar	[3.4 to 4.9]
Oil temperature	°C	100
Valve clearance - inlet	mm	0.40±0.05
Valve clearance - exhaust	mm	0.50±0.05
Firing order		1-3-4-2
No 1 cylinder position		TBE
Thermostat opening temperature	°C	78 to 82
Radiator cap pressure	bar	0.78

Fuel system

Uno Turbo ie 1.3 CAT

1989 to 1990

Idle speed - manual [auto]	rpm	850±50
Fast idle speed - manual [auto]	rpm	_
CO @ idle speed [3000 rpm] - see page VI	%	1.0±0.5
HC @ idle speed [3000 rpm] - see page VI	ppm	≤1200
CO2 @ idle speed [3000 rpm] - see page VI	%	_
O2 @ idle speed [3000 rpm] - see page VI	%	_
Carburettor / fuel injection		Bosch
Type / ref		LU2-Jetronic + Turbo
Main jet / needle		_
Injection pressure	bar	3.0±0.06
Pump pressure	bar	≤6.0
Octane rating	RON	95[U]

Ignition system

Uno Turbo ie 1.3 CAT

1989 to 1990

Type		Microplex Static
Ignition coil		Marelli BAE504BK
Primary resistance	ohms	0.31 to 0.38
Ballast resistor	ohms	_
Voltage - Tmnl 15(+) to earth	V	_
Distributor		Marelli
Points gap (air gap)	mm	_
Dwell angle	° (%)	_
Condenser capacity	µF	_
Rotation		Clockwise
Ignition timing - basic [static	° Crankshaft @ rpm	10±1.5 BTDC @ 850
V = Vacuum NV = No Vacuum		NV
Total ignition advance	° Crankshaft @ rpm	≤34±1.5 BTDC
	° Crankshaft @ rpm	_
	° Crankshaft @ rpm	_
Centrifugal check.	° Crankshaft @ rpm	Computer control
	° Crankshaft @ rpm	_
	° Crankshaft @ rpm	_
Vacuum range check	mbar	Computer control
Maximum vacuum advance	° Crankshaft	_
Spark plugs		Bosch/Champion
Type		FR6DTC / RC7BYC4
Electrode gap	mm	0.60 to 0.80 ¹

Electrical system

Uno Turbo ie 1.3 CAT

1989 to 1990

Battery	V / CC / RC	12 / 255 / 55Ah
Alternator voltage / full load current / engine rpm		13.9 to 14.5 / 65 / 3000
Starter motor current / voltage - cranking	A / V	190 to 220 / 9.8 to 10.4
- locked	A / V	420 / 8 to 9

Running gear

Uno Turbo ie 1.3 CAT

1989 to 1990

Brakes -		
Front (min. friction material thickness)	mm	1.5
Rear (min. friction material thickness)	mm	1.5

Tyres		
Saloon	Size	175/60x13
Estate / Van	Size	_
Pressure - front / rear - Saloon	bar	2.2 / 2.2
- Estate / Van	bar	_

Front suspension / wheel alignment		
Toe-in (+) / Toe-out (-)	mm [°]	+1.0±1.0
Camber		+25'±30'
Castor		+2°15'±20'
King pin inclination		_

Rear suspension / wheel alignment		
Toe-in (+) / Toe-out (-)	mm [°]	_
Camber		0

Torque wrench settings

Uno Turbo ie 1.3 CAT

1989 to 1990

Cylinder head - stage 1	Nm	20 ²
- stage 2	Nm	40 ²
Cylinder head - stage 3	Nm	+ 90 ^{°2}
- stage 4	Nm	+ 90 ^{°2}
Big-end bearings	Nm	51
Main bearings	Nm	80
Clutch cover	Nm	16
Flywheel [driveplate]	Nm	83
Front hubs	Nm	294
Rear hubs	Nm	216
Wheel nuts / bolts	Nm	86
Spark plugs	Nm	25 to 30

Capacities

Uno Turbo ie 1.3 CAT


1989 to 1990

Engine oil & filter	litres	4.1
Gearbox - 4-speed [5-speed]	litres	2.9
Automatic transmission - refill	litres	_
Final drive	litres	WT
Cooling system	litres	6.9
Fuel tank	litres	46

Notes and Illustrations

¹**RC7BYC4: 0.80 to 1.00**

²**Bolts 11 to 14 : 30**

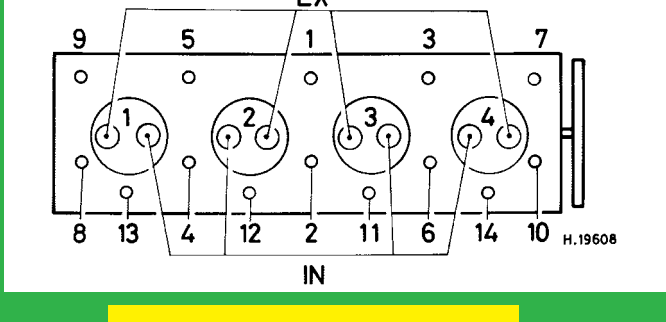

1301 cm³Turbo