

Engine & Cooling

Fuel

Ignition


Electrical

Running gear

Torque settings

Capacities

Notes & Illustrations

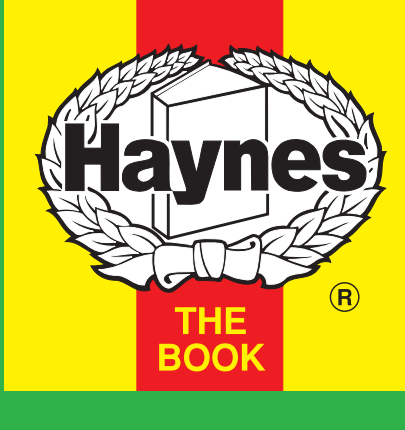

Automotive Technical
DATA BOOK

Click on one of the buttons above to view data for this car. To return to this screen and make another choice, click anywhere on the data screen.

MENU

HELP

Engine and cooling system

Cinquecento 704 CAT

1993 to 1997

Type		170 A.046 OHV 22kW US83
Capacity (cm ³) / number of cylinders		704 / 2
Compression ratio / pressure	bar	8.8 / _
Oil pressure	bar	[3.9 to 4.4]
Oil temperature	°C	100
Valve clearance - inlet	mm	0.15±0.05
Valve clearance - exhaust	mm	0.15±0.05
Firing order		1-2
No 1 cylinder position		_
Thermostat opening temperature	°C	85 to 89
Radiator cap pressure	bar	0.98

Fuel system

Cinquecento 704 CAT

1993 to 1997

Idle speed - manual [auto]	rpm	850±50
Fast idle speed - manual [auto]	rpm	_
CO @ idle speed [3000 rpm] - see page VI	%	≤0.3
HC @ idle speed [3000 rpm] - see page VI	ppm	≤200
CO2 @ idle speed [3000 rpm] - see page VI	%	_
O2 @ idle speed [3000 rpm] - see page VI	%	_
Carburettor / fuel injection		Aisan
Type / ref		1V Electronic
Main jet / needle		111
Injection pressure	bar	_
Pump pressure	bar	0.19 to 0.28
Octane rating	RON	95[U]

Ignition system

Cinquecento 704 CAT

1993 to 1997

Type		Nanoplex Static
Ignition coil		BAE 800 DK
Primary resistance	ohms	0.495 to 0.605
Ballast resistor	ohms	_
Voltage - Tmnl 15(+) to earth	V	_
Distributor		Marelli
Points gap (air gap)	mm	_
Dwell angle	° (%)	_
Condenser capacity	µF	_
Rotation		Clockwise
Ignition timing - basic [static	° Crankshaft @ rpm	10±2 BTDC @ 850±50
V = Vacuum NV = No Vacuum		_
Total ignition advance	° Crankshaft @ rpm	46±2 @ 4200 to 5000
	° Crankshaft @ rpm	_
	° Crankshaft @ rpm	_
Centrifugal check.	° Crankshaft @ rpm	_
	° Crankshaft @ rpm	_
	° Crankshaft @ rpm	_
Vacuum range check	mbar	_
Maximum vacuum advance	° Crankshaft	_
Spark plugs		Bosch/Champion
Type		WR7DC / RN9YC
Electrode gap	mm	0.70 to 0.80

Electrical system

Cinquecento 704 CAT

1993 to 1997

Battery	V / CC / RC	12 / 150 / 32Ah
Alternator voltage / full load current / engine rpm		14.0 to 14.3 / 55 / 3500
Starter motor current / voltage - cranking	A / V	200 / 9.8 to 10.0
- locked	A / V	440 / 7.6

Running gear

Cinquecento 704 CAT

1993 to 1997

Brakes -		
Front (min. friction material thickness)	mm	1.5
Rear (min. friction material thickness)	mm	1.5

Tyres		
Saloon	Size	135/70x13: 145/70x13
Estate / Van	Size	_
Pressure - front / rear - Saloon	bar	2.0 / 2.0
- Estate / Van	bar	_

Front suspension / wheel alignment		
Toe-in (+) / Toe-out (-)	mm [°]	0±1.0
Camber		+30'±30' N/A
Castor		+1°50'±30' N/A
King pin inclination		_

Rear suspension / wheel alignment		
Toe-in (+) / Toe-out (-)	mm [°]	0±3.0 N/A
Camber		+20'±30' N/A

Torque wrench settings

Cinquecento 704 CAT

1993 to 1997

Cylinder head - stage 1	Nm	M10: 20 + 90° + 90°
- stage 2	Nm	M8: 20 + 70°
Cylinder head - stage 3	Nm	M8 (side): 20 + 50°
- stage 4	Nm	_
Big-end bearings	Nm	34
Main bearings	Nm	27
Clutch cover	Nm	10
Flywheel [driveplate]	Nm	44
Front hubs	Nm	WSM
Rear hubs	Nm	216
Wheel nuts / bolts	Nm	86
Spark plugs	Nm	28


Capacities

Cinquecento 704 CAT

1993 to 1997

Engine oil & filter	litres	2.25
Gearbox - 4-speed [5-speed]	litres	1.4
Automatic transmission - refill	litres	_
Final drive	litres	WT
Cooling system	litres	4.0
Fuel tank	litres	35

Notes and Illustrations

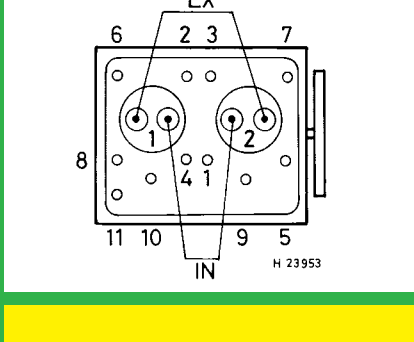

704 cm³