

Engine & Cooling

Fuel

Ignition


Electrical

Running gear

Torque settings

Capacities

Notes & Illustrations

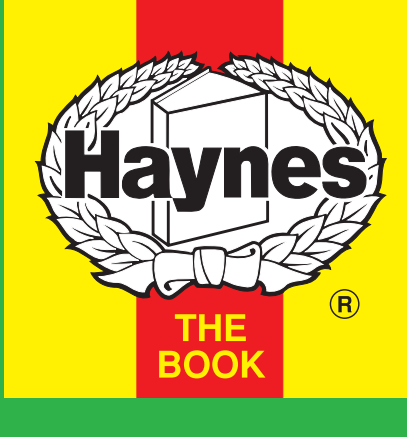

Automotive Technical
DATA BOOK

Click on one of the buttons above to view data for this car. To return to this screen and make another choice, click anywhere on the data screen.

MENU

HELP

Engine and cooling systemXJ12 & Double 6, 5.31981 to 1989

Type		HE V12
Capacity (cm³) / number of cylinders		5343 / 12
Compression ratio / pressure	bar	12.5 / ≥13.8
Oil pressure	bar	1.4
Oil temperature	°C	80
Valve clearance - inlet	mm	0.25 to 0.30
Valve clearance - exhaust	mm	0.25 to 0.30
Firing order		1-12-5-8-3-10-6-7-2-11-4-9
No 1 cylinder position		FR
Thermostat opening temperature	°C	88
Radiator cap pressure	bar	1.0

Fuel systemXJ12 & Double 6, 5.31981 to 1989

Idle speed - manual [auto]	rpm	750±25
Fast idle speed - manual [auto]	rpm	—
CO @ idle speed [3000 rpm] - see page VI	%	≤0.5
HC @ idle speed [3000 rpm] - see page VI	ppm	≤200
CO2 @ idle speed [3000 rpm] - see page VI	%	—
O2 @ idle speed [3000 rpm] - see page VI	%	—
Carburettor / fuel injection		Lucas
Type / ref		Digital P
Main jet / needle		—
Injection pressure	bar	2.5
Pump pressure	bar	2.5 to 2.7
Octane rating	RON	98[L]

Ignition systemXJ12 & Double 6, 5.31981 to 1989

Type		Electronic
Ignition coil		Lucas 35C6. Ducellier 2526019
Primary resistance	ohms	0.9 to 1.1
Ballast resistor	ohms	—
Voltage - Tmnl 15(+) to earth	V	—
Distributor		Lucas
Points gap (air gap)	mm	[0.15 to 0.20]
Dwell angle	° (%)	—
Condenser capacity	µF	—
Rotation		Anticlockwise
Ignition timing - basic [static	° Crankshaft @ rpm	18 BTDC @ 3000
V = Vacuum NV = No Vacuum		NV
Total ignition advance	° Crankshaft @ rpm	—
	° Crankshaft @ rpm	—
	° Crankshaft @ rpm	—
Centrifugal check.	° Crankshaft @ rpm	0 @ 800
	° Crankshaft @ rpm	12 to 16 @ 2000¹
	° Crankshaft @ rpm	22 to 26 @ 5200¹
Vacuum range check	mbar	203 to 507²
Maximum vacuum advance	° Crankshaft	14 to 18²
Spark plugs		NGK/Champion
Type		BR7EFS / RS5C
Electrode gap	mm	0.64

Electrical systemXJ12 & Double 6, 5.31981 to 1989

Battery	V / CC / RC	12 / 68Ah
Alternator voltage / full load current / engine rpm		13.8 to 15.0 / _ / 3000
Starter motor current / voltage - cranking	A / V	—
- locked	A / V	940 / 6.5

Running gearXJ12 & Double 6, 5.31981 to 1989

Brakes -		
Front (min. friction material thickness)	mm	—
Rear (min. friction material thickness)	mm	—

Tyres		
Saloon	Size	205/70x15: 215/70x15
Estate / Van	Size	—
Pressure - front / rear - Saloon	bar	2.1 / 1.8
- Estate / Van	bar	—

Front suspension / wheel alignment

Toe-in (+) / Toe-out (–)	mm [°]	0 to +3.2
Camber		-30'±15'
Castor		+3°30'±15'
King pin inclination		+1°30'

Rear suspension / wheel alignment

Toe-in (+) / Toe-out (–)	mm [°]	0±0.8
Camber		-45'±15'

Torque wrench settingsXJ12 & Double 6, 5.31981 to 1989

Cylinder head - stage 1	Nm	0.438 in. nut: 68
- stage 2	Nm	0.375 in. nut: 38
Cylinder head - stage 3	Nm	—
- stage 4	Nm	—
Big-end bearings	Nm	55
Main bearings	Nm	0.5 in. nut: 83³
Clutch cover	Nm	—
Flywheel [driveplate]	Nm	88
Front hubs	Nm	WSM
Rear hubs	Nm	136 to 163
Wheel nuts / bolts	Nm	88 to 101
Spark plugs	Nm	—

CapacitiesXJ12 & Double 6, 5.31981 to 1989

Engine oil & filter	litres	10.0
Gearbox - 4-speed [5-speed]	litres	—
Automatic transmission - refill	litres	10.2
Final drive	litres	1.0
Cooling system	litres	19.8
Fuel tank	litres	2x 45.5


Notes and Illustrations

¹Later models: 11 to 15 @ 2000, 20 to 24 @ 6200


²Later models: 169 to 508 @ 12°

³0.375 in. nut: 38


1: Idle speed 2: CO / Mixture

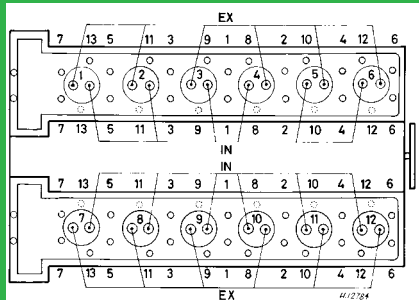

5343 cm³

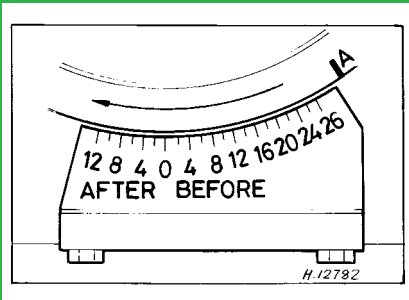

5343 cm³

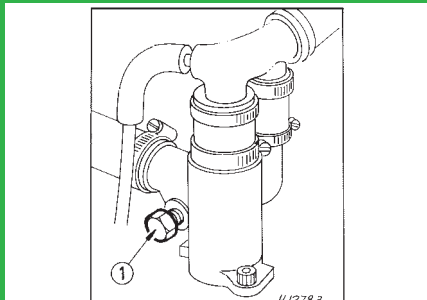

Digital P, V12