


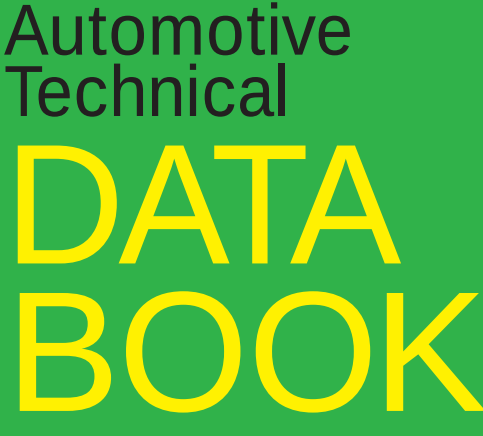

HELP

Micra 1.0 (K10)	1990 to 1993
25 SOLIC 40kW	

Capacity (cm ³) / number of cylinders		988 / 4
Compression ratio / pressure	bar	10.3 / ≥12.3
Oil pressure	bar	[2.9]
Oil temperature	°C	—
Valve clearance - inlet	mm	0.25 H
Valve clearance - exhaust	mm	0.30 H
Firing order		1-3-4-2
No 1 cylinder position		TBE
Thermostat opening temperature	°C	88
Radiator cap pressure	bar	0.90

Micra 1.0 (K10) 1990 to 1993

Idle speed - manual [auto]	rpm	800±50. A/C: 850±50
Fast idle speed - manual [auto]	rpm	1700 to 2100 [1800 to 2200]
CO @ idle speed [3000 rpm] - see page VI	%	1.5±0.5
HC @ idle speed [3000 rpm] - see page VI	ppm	≤1200
CO2 @ idle speed [3000 rpm] - see page VI	%	—
O2 @ idle speed [3000 rpm] - see page VI	%	—
Carburettor / fuel injection		Hitachi
Type / ref		DCZ306-87
Main jet / needle		93, 130
Injection pressure	bar	—
Pump pressure	bar	0.20 to 0.27
Octane rating	RON	95[E 95 RON]

Micra 1.0 (K10)	1990 to 1993
------------------------	---------------------

Type		Electronic
Ignition coil		Mitsubishi. Hitachi
Primary resistance	ohms	1.0 to 1.2
Ballast resistor	ohms	—
Voltage - Tmnl 15(+) to earth	V	—
Distributor		Hitachi/Mitsubishi
Points gap (air gap)	mm	[0.30 to 0.45]
Dwell angle	° (%)	—
Condenser capacity	µF	—
Rotation		Anticlockwise
Ignition timing - basic [static	° Crankshaft @ rpm	4±1 BTDC @ idle
V = Vacuum NV = No Vacuum		NV
Total ignition advance	° Crankshaft @ rpm	11±5 BTDC @ idle
	° Crankshaft @ rpm	—
	° Crankshaft @ rpm	—
Centrifugal check.	° Crankshaft @ rpm	0 @ 1590 to 2000
	° Crankshaft @ rpm	—
	° Crankshaft @ rpm	13 to 17 @ 4800
Vacuum range check	mbar	107 to 313 ¹
Maximum vacuum advance	° Crankshaft	16. AT: 11
Spark plugs		NGK/Champion
Type		BPR5ES / RN9YC
Electrode gap	mm	0.80 to 0.90

Micra 1.0 (K10)	1990 to 1993
------------------------	---------------------

Battery	V / CC / RC	12 / 45Ah
Alternator voltage / full load current / engine rpm		14.1 to 14.7 / _ / 2500
Starter motor current / voltage - cranking	A / V	55 [AT: 65] / 11.5 (no load)
	A / V	

Micra 1.0 (K10)	1990 to 1993
------------------------	---------------------

Brakes -

Front (min. friction material thickness)	mm	2.0
Rear (min. friction material thickness)	mm	1.5

Tyres

Saloon	Size	145x12: 155x12: 155/70x13
Estate / Van	Size	—
Pressure - front / rear - Saloon	bar	2.1 / 2.2
Pressure - front / rear - Estate / Van	bar	2.1 / 2.2

Front suspension / wheel alignment

Toe-in (+) / Toe-out (-)	mm [°]	+2.0 to 4.0
Camber		-25' to +1°5' N/A
Castor		+1°30' to 3° N/A
King pin inclination		+12°25' to 13°55' N/A

Rear suspension / wheel alignment

Toe-in (+) / Toe-out (-)	mm [°]	—
Camber		

Model	Period
Micra 1.0 (K10)	1990 to 1993

Torque Wrench Settings		Micro 1.0 (R10)	1990 to 1993
Cylinder head - stage 1	Nm	34 to 39	
- stage 2	Nm	64 to 69	
Cylinder head - stage 3	Nm	—	
- stage 4	Nm	—	
Big-end bearings	Nm	29 to 34	
Main bearings	Nm	46 to 52 in stages	
Clutch cover	Nm	22 to 29	
Flywheel [driveplate]	Nm	59 to 69 ²	
Front hubs	Nm	147 to 206	
Rear hubs	Nm	186 to 255	
Wheel nuts / bolts	Nm	78 to 98	
Spark plugs	Nm	25 to 30	

Model	Period
Micra 1.0 (K10)	1990 to 1993


Capacities		Micro 1.0 (R10)	1990 to 1993
Engine oil & filter	litres	2.8	
Gearbox - 4-speed [5-speed]	litres	2.6	
Automatic transmission - refill	litres	6.0	
Final drive	litres	WT	
Cooling system	litres	4.7	
Fuel tank	litres	40	

Notes and Illustrations

²[70 to 80]

-[70 to 80]

2: CO / Mixture

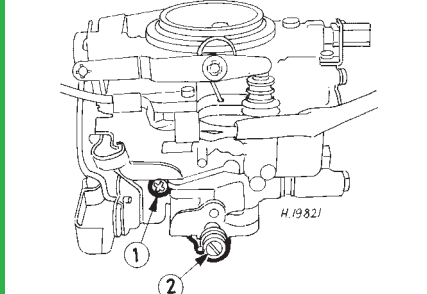

Hitachi DCZ