

Engine & CoolingFuelIgnitionElectricalRunning gearTorque settingsCapacitiesNotes & Illustrations



Automotive Technical
DATA BOOK

Click on one of the buttons above to view data for this car. To return to this screen and make another choice, click anywhere on the data screen.

MENUHELP

Engine and cooling system

106, 1.41991 to 1992

Type	TU3F.2/K (K2D) (55kW)	
Capacity (cm³) / number of cylinders	1360 / 4	
Compression ratio / pressure	bar	9.3 / _
Oil pressure	bar	1.5 [3.0]
Oil temperature	°C	80
Valve clearance - inlet	mm	0.20
Valve clearance - exhaust	mm	0.40
Firing order	1-3-4-2	
No 1 cylinder position	FE	
Thermostat opening temperature	°C	88
Radiator cap pressure	bar	1.4

Fuel system

106, 1.41991 to 1992

Idle speed - manual [auto]	rpm	750±50
Fast idle speed - manual [auto]	rpm	_
CO @ idle speed [3000 rpm] - see page VI	%	1.5±0.5
HC @ idle speed [3000 rpm] - see page VI	ppm	≤1200
CO2 @ idle speed [3000 rpm] - see page VI	%	_
O2 @ idle speed [3000 rpm] - see page VI	%	_
Carburettor / fuel injection	Solex	
Type / ref	32-34 Z2 528 or 528/1	
Main jet / needle	120, 122	
Injection pressure	bar	_
Pump pressure	bar	0.25
Octane rating	RON	97[E 95 RON]

Ignition system

106, 1.41991 to 1992

Type	Electronic - Hall effect	
Ignition coil	Bosch, Ducellier BTR01	
Primary resistance	ohms	0.7
Ballast resistor	ohms	_
Voltage - Tmnl 15(+) to earth	V	_
Distributor	Ducellier	
Points gap (air gap)	mm	_
Dwell angle	° (%)	_
Condenser capacity	µF	_
Rotation	Anticlockwise	
Ignition timing - basic [static	° Crankshaft @ rpm	8 BTDC @ 750
V = Vacuum NV = No Vacuum	NV	
Total ignition advance	° Crankshaft @ rpm	C068-D047
	° Crankshaft @ rpm	_
	° Crankshaft @ rpm	_
Centrifugal check.	° Crankshaft @ rpm	6 to 8 @ 1000
	° Crankshaft @ rpm	12 to 14 @ 2400
	° Crankshaft @ rpm	17 to 19 @ 5600
Vacuum range check	mbar	240 to 613
Maximum vacuum advance	° Crankshaft	14 to 18
Spark plugs	Bosch/Champion	
Type	F7DCOR / C9YCX	
Electrode gap	mm	0.80

Electrical system

106, 1.41991 to 1992

Battery	V / CC / RC	12 / 200 / 33Ah
Alternator voltage / full load current / engine rpm	13.8 to 14.8 / _ / 3000	
Starter motor current / voltage - cranking	A / V	_
- locked	A / V	_

Running gear

106, 1.41991 to 1992

Brakes -		
Front (min. friction material thickness)	mm	1.0
Rear (min. friction material thickness)	mm	_

Tyres		
Saloon	Size	155/70x13
Estate / Van	Size	_
Pressure - front / rear - Saloon	bar	2.0 / 2.0
- Estate / Van	bar	_

Front suspension / wheel alignment		
Toe-in (+) / Toe-out (-)	mm [°]	+0.5±0.5 PW
Camber	-46'±30'	
Castor	+2°15'±30'	
King pin inclination	+12°49'±40'	

Rear suspension / wheel alignment		
Toe-in (+) / Toe-out (-)	mm [°]	+1.95±0.9 PW
Camber	-1°34'±30'	

Torque wrench settings

106, 1.41991 to 1992

Cylinder head - stage 1	Nm	20
- stage 2	Nm	+ 120°
Cylinder head - stage 3	Nm	+ 120°
- stage 4	Nm	_
Big-end bearings	Nm	40
Main bearings	Nm	WSM
Clutch cover	Nm	15
Flywheel [driveplate]	Nm	60 LkC
Front hubs	Nm	250
Rear hubs	Nm	140
Wheel nuts / bolts	Nm	85
Spark plugs	Nm	28




Capacities

106, 1.41991 to 1992

Engine oil & filter	litres	3.5
Gearbox - 4-speed [5-speed]	litres	2.0
Automatic transmission - refill	litres	_
Final drive	litres	WT
Cooling system	litres	6.0
Fuel tank	litres	45

Notes and Illustrations

1: Idle speed2: CO / Mixture

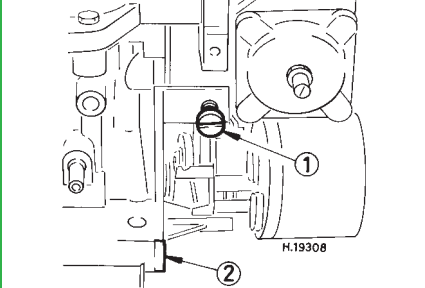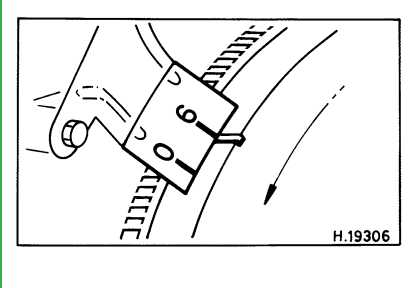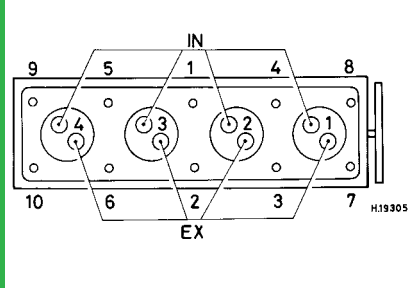

1360 cm³, TU31360 cm³, TU3Solex 32-34 Z2