


Engine & Cooling	Fuel	Ignition	Electrical	Running gear	Torque settings	Capacities	Notes & Illustrations
------------------	------	----------	------------	--------------	-----------------	------------	-----------------------

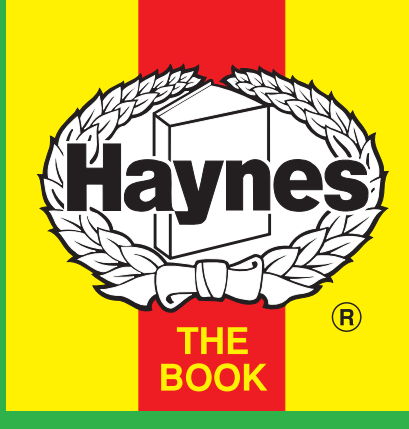

Automotive
Technical
DATA
BOOK

Click on one of the buttons above to view data for this car. To return to this screen and make another choice, click anywhere on the data screen.

MENU	HELP
------	------

Engine and cooling system9441988

Type		M44 /09
Capacity (cm³) / number of cylinders		2479 / 4
Compression ratio / pressure	bar	10.2 / ≥10.0
Oil pressure	bar	[3.5]
Oil temperature	°C	80
Valve clearance - inlet	mm	0: Hyd.
Valve clearance - exhaust	mm	0: Hyd.
Firing order		1-3-4-2
No 1 cylinder position		TBE
Thermostat opening temperature	°C	81 to 85
Radiator cap pressure	bar	0.90 to 1.15

Fuel system9441988

Idle speed - manual [auto]	rpm	840±40
Fast idle speed - manual [auto]	rpm	—
CO @ idle speed [3000 rpm] - see page VI	%	1.0±0.5
HC @ idle speed [3000 rpm] - see page VI	ppm	≤1200
CO2 @ idle speed [3000 rpm] - see page VI	%	—
O2 @ idle speed [3000 rpm] - see page VI	%	—
Carburettor / fuel injection		Bosch
Type / ref		DME Motronic
Main jet / needle		—
Injection pressure	bar	—
Pump pressure	bar	2.5
Octane rating	RON	95[E 95 RON]

Ignition system9441988

Type		DME Motronic
Ignition coil		Bosch
Primary resistance	ohms	0.4 to 0.6
Ballast resistor	ohms	—
Voltage - Tmnl 15(+) to earth	V	—
Distributor		Bosch
Points gap (air gap)	mm	—
Dwell angle	° (%)	—
Condenser capacity	µF	—
Rotation		—
Ignition timing - basic [static	° Crankshaft @ rpm	10±3 BTDC @ 840±40
V = Vacuum NV = No Vacuum		—
Total ignition advance	° Crankshaft @ rpm	—
	° Crankshaft @ rpm	—
	° Crankshaft @ rpm	—
Centrifugal check.	° Crankshaft @ rpm	Computer control
	° Crankshaft @ rpm	—
	° Crankshaft @ rpm	—
Vacuum range check	mbar	Computer control
Maximum vacuum advance	° Crankshaft	—
Spark plugs		Bosch/Champion
Type		WR4DC / RN9YCC
Electrode gap	mm	0.70 to 0.80

Electrical system9441988

Battery	V / CC / RC	12 / 265 / 80
Alternator voltage / full load current / engine rpm		—
Starter motor current / voltage - cranking	A / V	—
- locked	A / V	—

Running gear9441988

Brakes -		
Front (min. friction material thickness)	mm	2.0
Rear (min. friction material thickness)	mm	2.5

Tyres		
Saloon	Size	195/65x15: 205/55x16:225/50x16
Estate / Van	Size	—
Pressure - front / rear - Saloon	bar	2.0 / 2.5
- Estate / Van	bar	—

Front suspension / wheel alignment		
Toe-in (+) / Toe-out (–)	mm [°]	+1.0±0.5
Camber		-20'±15'
Castor		+2°30'-15'+30'
King pin inclination		—

Rear suspension / wheel alignment		
Toe-in (+) / Toe-out (–)	mm [°]	0±1.0 PW
Camber		-25'±30'

Torque wrench settings9441988

Cylinder head - stage 1	Nm	20 oiled
- stage 2	Nm	50
Cylinder head - stage 3	Nm	90, leave 30 minutes
- stage 4	Nm	- 90°, then 90
Big-end bearings	Nm	Smooth bearing: 57 ¹
Main bearings	Nm	WSM
Clutch cover	Nm	32
Flywheel [driveplate]	Nm	90
Front hubs	Nm	WSM
Rear hubs	Nm	380±70
Wheel nuts / bolts	Nm	130
Spark plugs	Nm	30


Capacities9441988

Engine oil & filter	litres	6.0
Gearbox - 4-speed [5-speed]	litres	2.0
Automatic transmission - refill	litres	6.0
Final drive	litres	AT: 1.0
Cooling system	litres	8.5
Fuel tank	litres	80


Notes and Illustrations

¹Ribbed bearing: 75


1: Idle speed 2: CO / Mixture

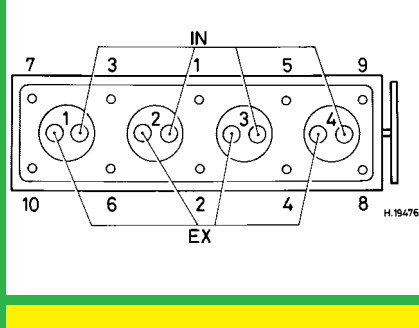


2479 cm³, 8V

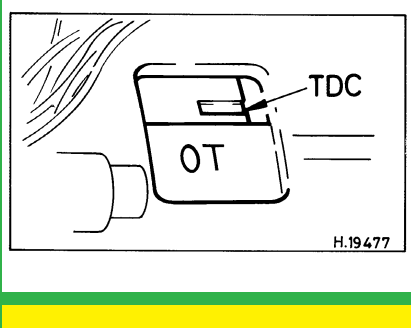

2479 cm³, 8V

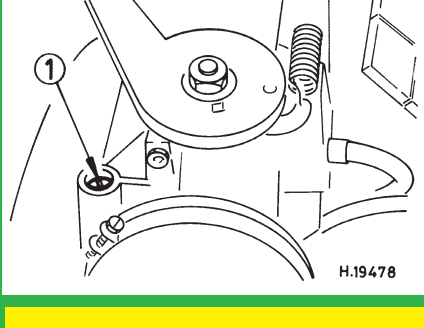

DME Motronic, 8V

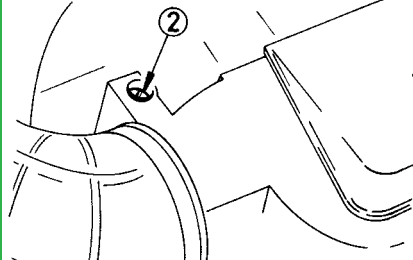

DME Motronic, 8V