

Master Cylinder


Reassembly

CAUTION:

- Make sure all parts are clean before reassembly.
 - Use only new replacement parts.
 - Use only clean DOT 3 or DOT 4 brake fluid.
 - Do not allow dirt or other foreign matter to contaminate the brake fluid.
 - Do not mix different brands of brake fluid.
 - Avoid spilling brake fluid on painted, plastic or rubber surfaces as it can damage the finish.
- Wash spilled brake fluid off immediately with clean water.

1. Lubricate the new piston assemblies with brake fluid.
2. Install the new O-ring and secondary cup onto the piston guide.


PISTON GUIDE ASSEMBLY

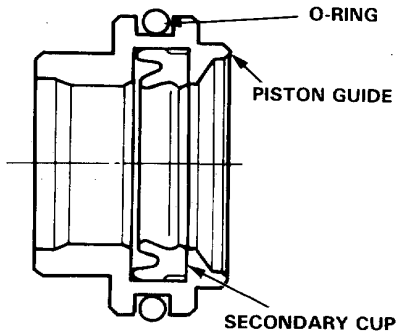

NOTE: Replace the secondary cup and piston guide as a set if necessary.

3. Make sure that the primary piston assembly and secondary piston assembly are in good condition.

PRIMARY PISTON ASSEMBLY

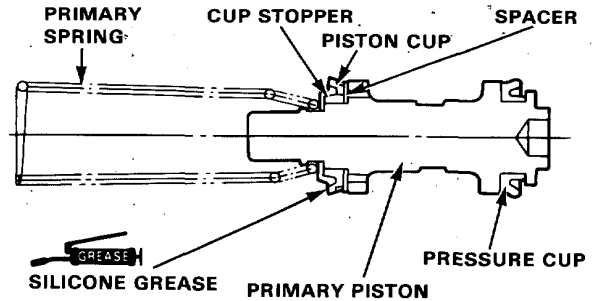

SECONDARY PISTON ASSEMBLY

