


# Sunroof

## Guide Rails/Cable Replacement


1. With sunroof out of the car, remove the sunroof motor from the frame (page 14-35).
2. Remove the guide rail mounting nuts and lift off the guide rails, then remove the cables with sliders attached.
3. If necessary, remove the sunshade rail and frame seal from the sunroof frame.

NOTE: Take care not to bend the cable pipes and guide rails.

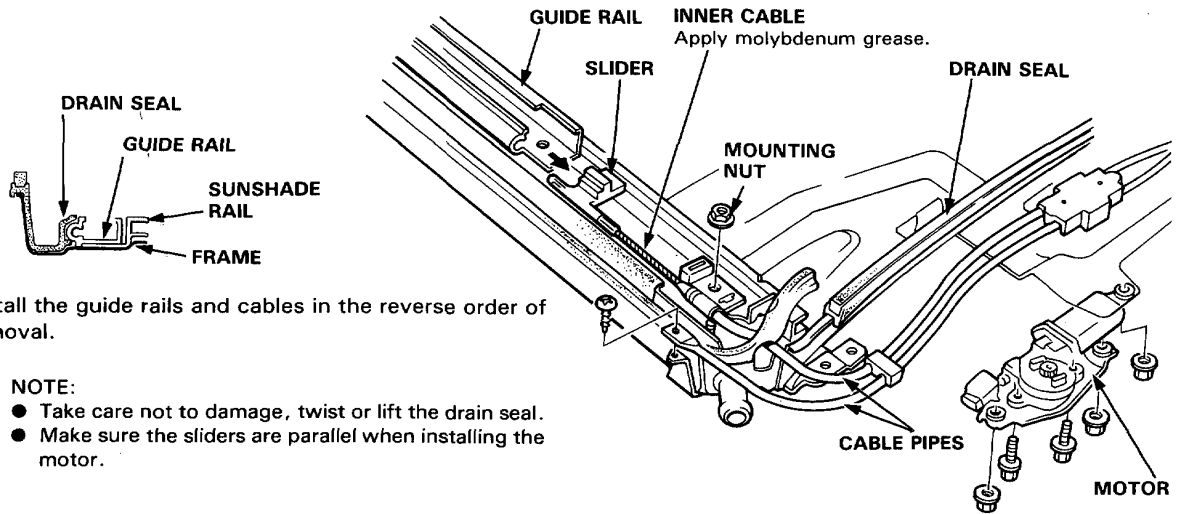

## Link Slider/Lift-up Link Disassembly

1. Remove the sliding glass (page 14-34).
2. Pull the front slider from the front stay.
3. Remove the link lifter, then remove the E-clip.
4. Remove the lift-up link from the rear stay. Strike the link shaft out, then separate the lift-up link and link slider.

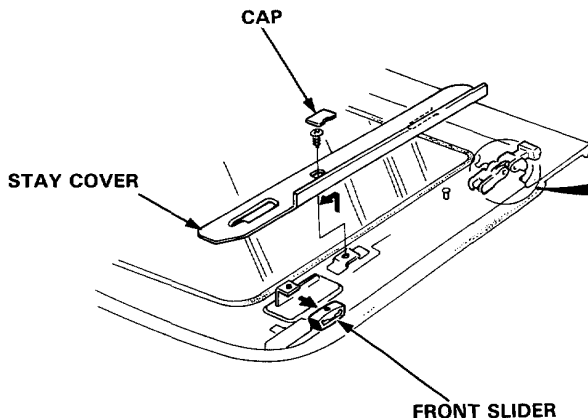

5. Assemble the slider and lift-up link in the reverse order of removal.

NOTE:

- Damaged parts should be replaced.
- Apply the grease to the sliding portion.