




# Roof Molding/Side Moldings

## Roof Molding/Side Window Moldings Replacement

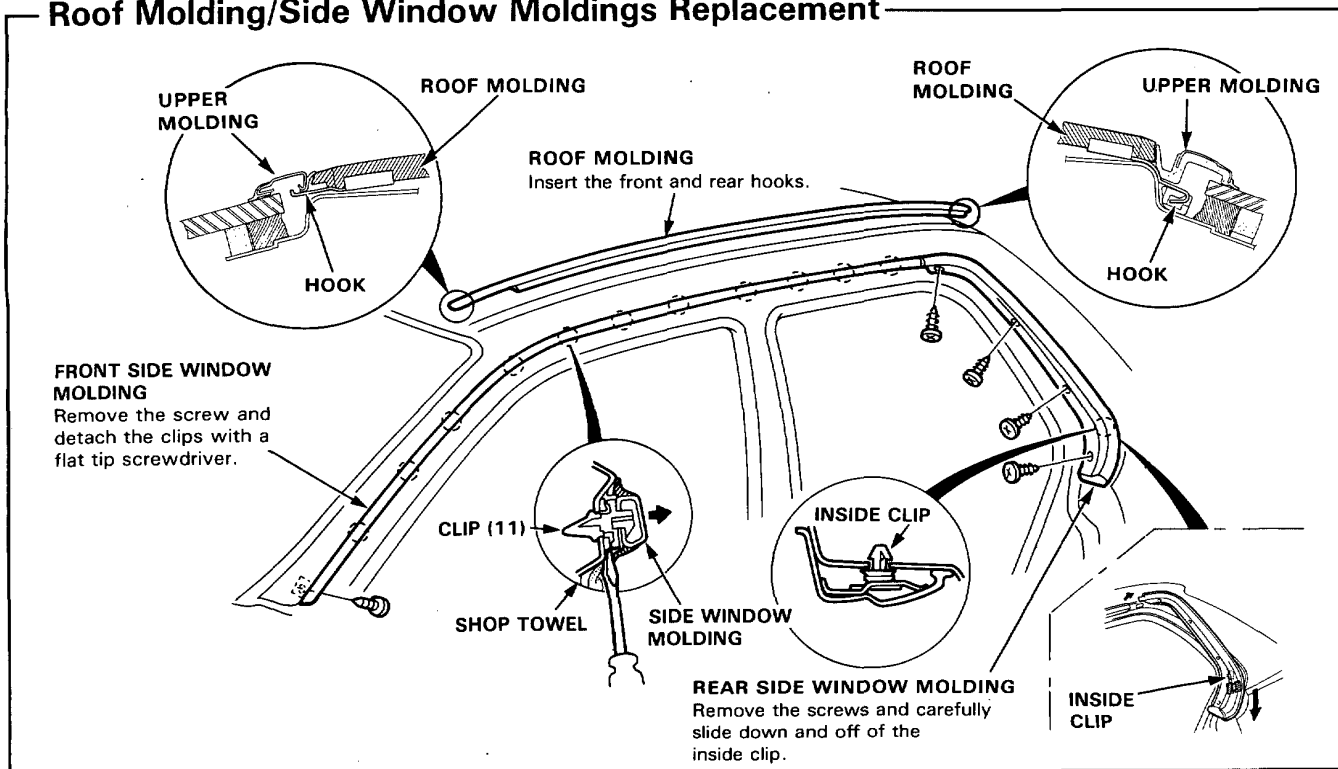

## Side Moldings Replacement

1. Remove the door panel and turn over the plastic cover.
2. Remove the plastic nut and detach the center clips from inside of the door.
3. Peel off the molding and detach the side clips, then remove the door moldings.

**NOTE:** Before reassembling, clean the body bonding surface with a sponge dampened in alcohol.

