


# Front Grille/License Plate Trim

## Front Grille Replacement

NOTE: Take care not to damage the front grille and grille moldings.

1. Remove the 5 screws.
2. Push the clips on each side with a flat tip screwdriver as shown, then remove the front grille.
3. Set the clips onto the front grille, then install the front grille in the reverse order of removal.

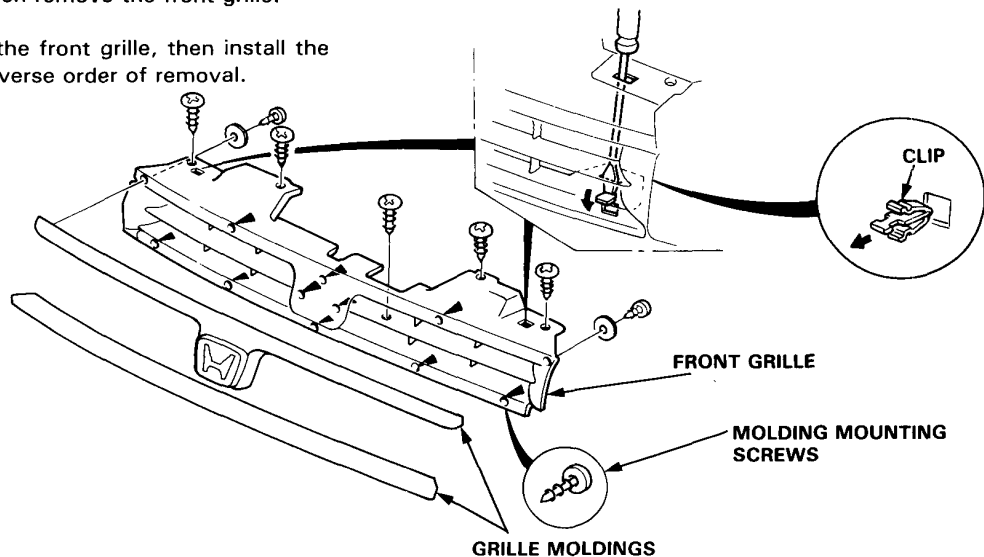

## License Plate Trim Replacement

1. Remove the taillights and license plate.
2. Remove the bolts and detach the clips from inside of the trunk lid, then remove the license plate trim.

NOTE: Take care not to scratch the trim.

3. Installation is the reverse of the removal procedure.

NOTE: If necessary, replace any damaged clips.

⊗ : Clip locations

