


Neutral/Back-Up Light Switch

Testing / Installation


Move the selector lever to Park, Reverse, and Neutral to check continuity of combined neutral safety (inhibiter) and back-up light switch.

Replace the switch if there is no continuity between connector terminals shown on the chart.

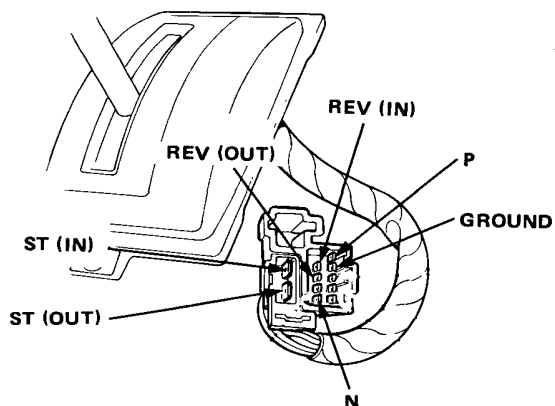

	B/W	Y	B/W	G/B
N	○		○	
R		○		○
P	○		○	
	ST(IN)	REV(IN)	ST(OUT)	REV(OUT)

1. Position the switch slider to neutral, as shown.
2. Shift selector lever to neutral.
3. Align the switch lug with the actuator rod.

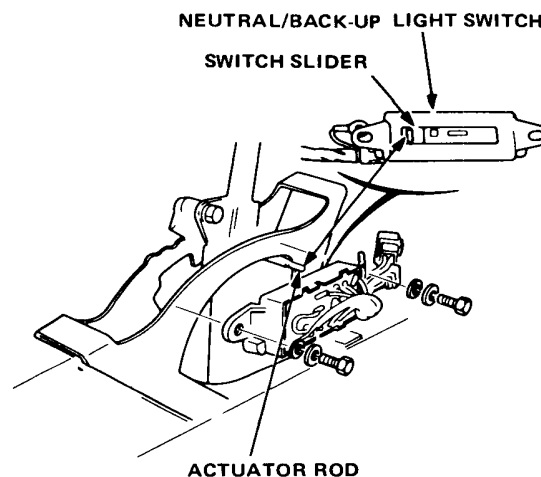

4. Tighten the bolts.