






Washer Hose Replacement

▷: Washer nozzle, clip and hose cushion locations

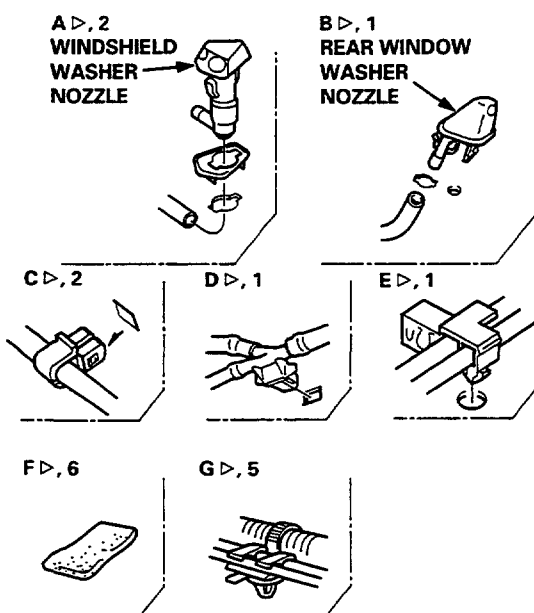

Roll the washer hoses to the washer reservoir as shown.

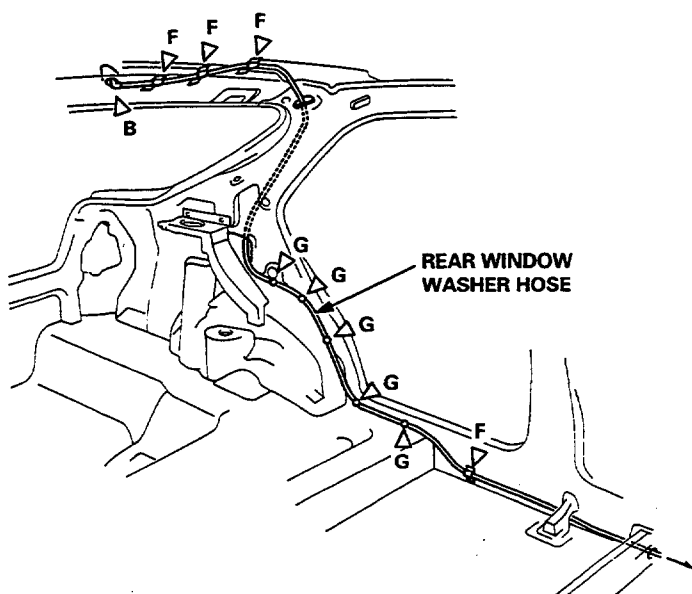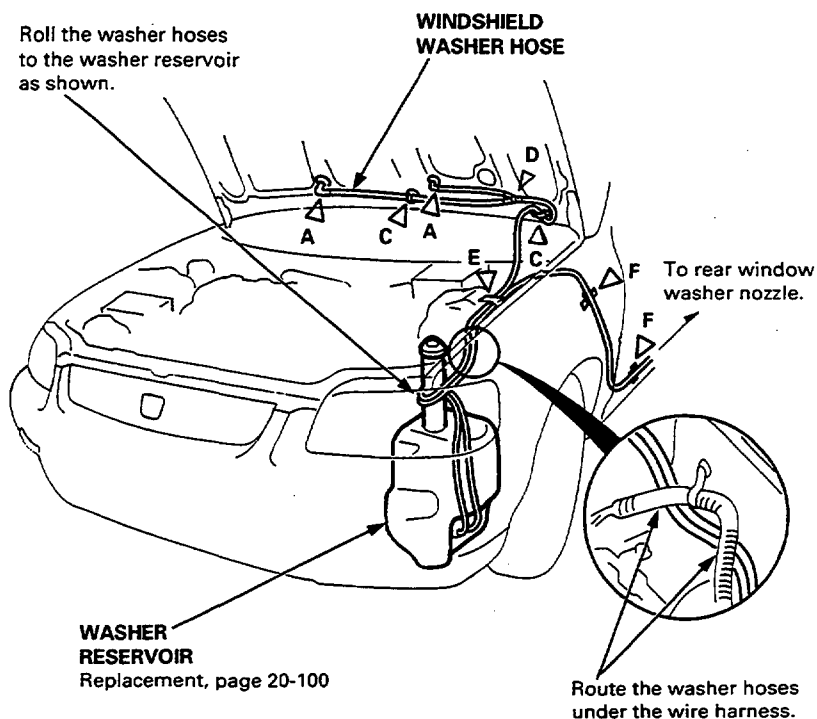

Installation is the reverse of the removal procedure.

NOTE:

- Take care not to pinch the washer hoses.
- If necessary, replace any damaged clips.
- After installing, adjust the aim of the washer nozzles.

To remove the rear window washer hose, first remove the following parts.

- Kick panel (see page 20-55)
- Front and rear door sill molding (see pages 20-55, 57)
- Center pillar lower trim (see page 20-56)
- Rear seat-back (see page 20-66)
- Rear shelf and rear side shelf (see page 20-56)
- Rear seat side trim (see page 20-57)
- Rear pillar trim panel (see page 20-57)
- Rear edge of the headliner (see page 20-59)
- Carpet as necessary (see page 20-75)