

# Bumpers

## Rear Bumper Replacement


**CAUTION:** Wear gloves to remove and install the rear bumper.

**NOTE:**

- An assistant is helpful when removing the rear bumper.
- Take care not to scratch the rear bumper.
- Open the tailgate.

1. Remove the screw from each side.

▷: Screw locations, 2

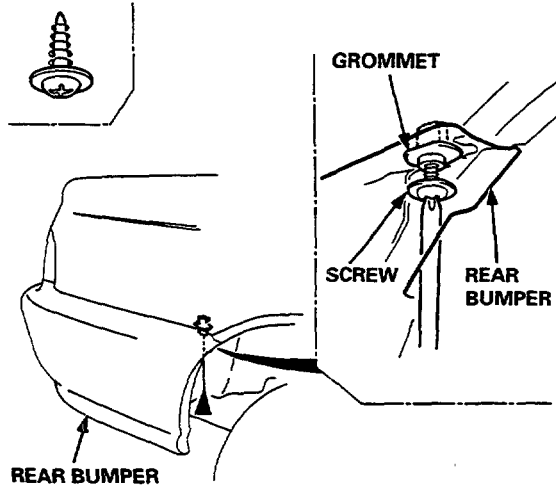


2. Remove the clips, then remove the rear bumper.

▷: Clip locations


A ▷, 7

B ▷, 3

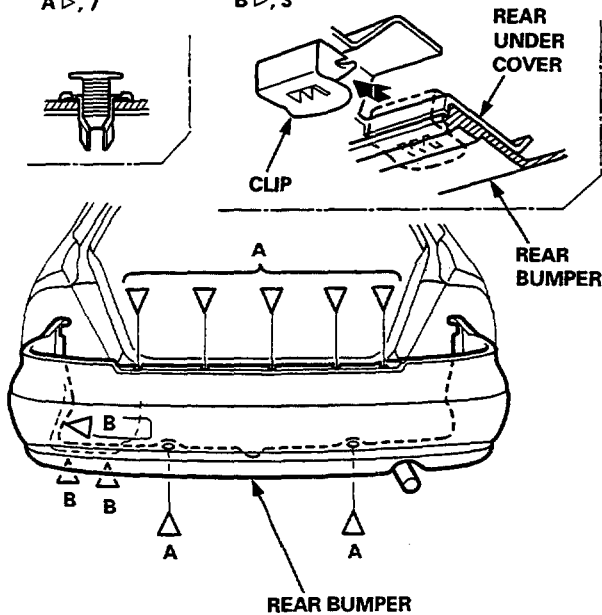

3. Disconnect the rear fog light connector.

**NOTE:** LHD is shown, RHD is symmetrical.

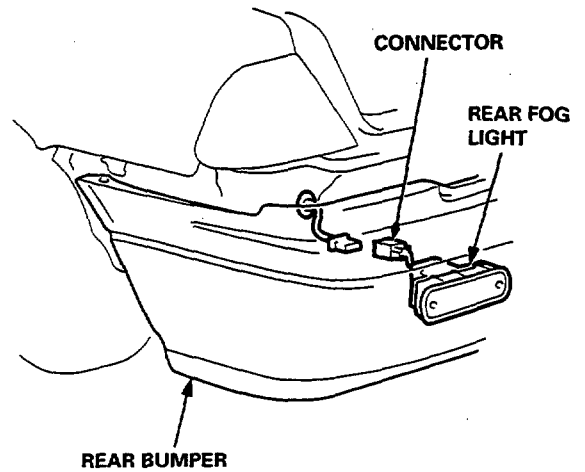

4. Installation is the reverse of the removal procedure.

**NOTE:**

- If necessary, replace any damaged clips.
- Make sure the rear bumper engages the side clip and hook on each side securely.
- Install the rear under cover clip securely.

