


Front Map Light

Removal

1. Turn the light switch OFF.
2. Pry off the lens.
3. Remove the 2 screws, the housing and the map light trim.
4. Disconnect the 3-P connector from the housing.

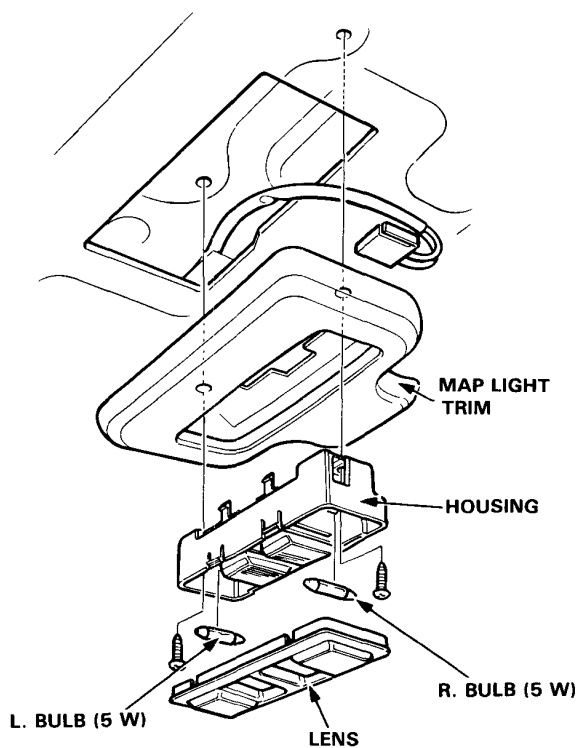

Test

1. Remove the front map light.
2. There should be continuity between the \oplus and \ominus terminals, with a bulb installed and the switch ON. There should be no continuity with the switch OFF.

