




Engine Tune-up

Engine Oil Replacement

1. Warm up the engine.
2. Drain the engine oil.

CAUTION: Used engine oil may cause skin cancer if repeatedly left in contact with the skin for prolonged periods. Although this is unlikely unless you handle used oil on a daily basis, it is still advisable to thoroughly wash your hands with soap and water as soon as possible after handling used oil.

NOTE: Remove the filler cap to speed draining.

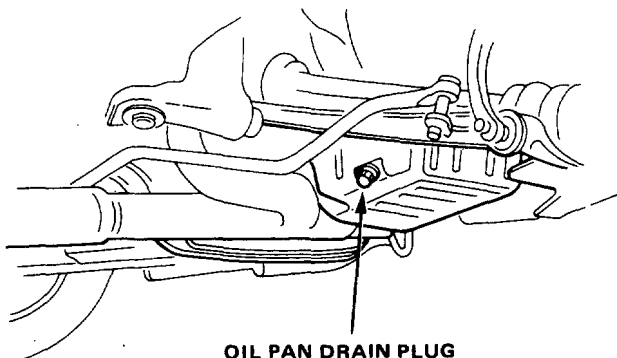

OIL PAN DRAIN PLUG
45 N·m (4.5 kg-m, 33 lb-ft)

3. Reinstall the drain plug with a new washer, and refill with the recommended oil.

Requirement	SE or SF Grade only
Capacity	4.5 l (4.8 U.S. qt., 4.0 Imp. qt.) at change, including filter. 5.7 l (6.0 U.S. qt., 5.0 Imp. qt.) after engine overhaul.
Change	Every 10,000 km (6,000 miles) or 6 months

NOTE: Oil filter should be replaced at each oil change.

Recommended Engine Oil (SE or SF Grade only)

