




Installation


CAUTION :

- Be sure to install the SRS wiring so that it is not pinched or interfering with other car parts.
- Be sure the battery cables are disconnected.


1. Place the airbag assembly on the steering wheel, and secure it with new TORX ® bolts.

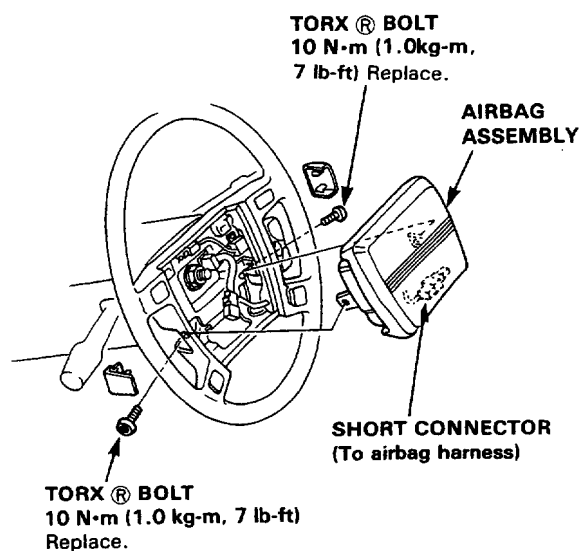

2. Install lid B and the cruise control set/resume switch cover.

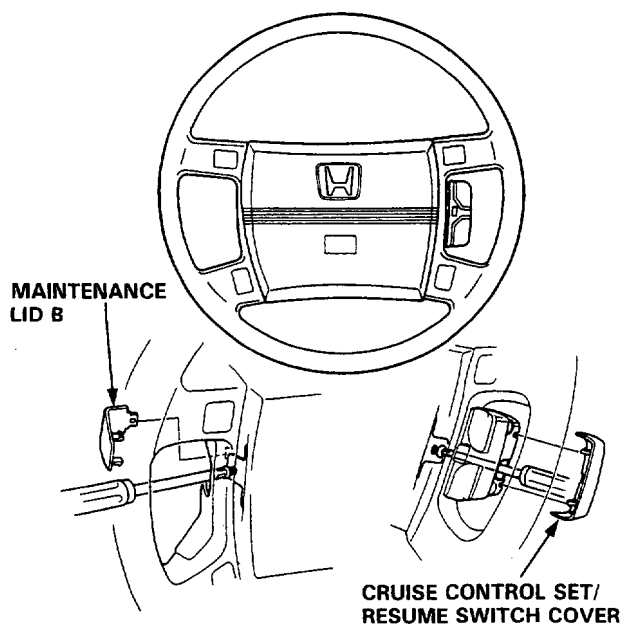

3. Disconnect the short connector from the airbag connector.

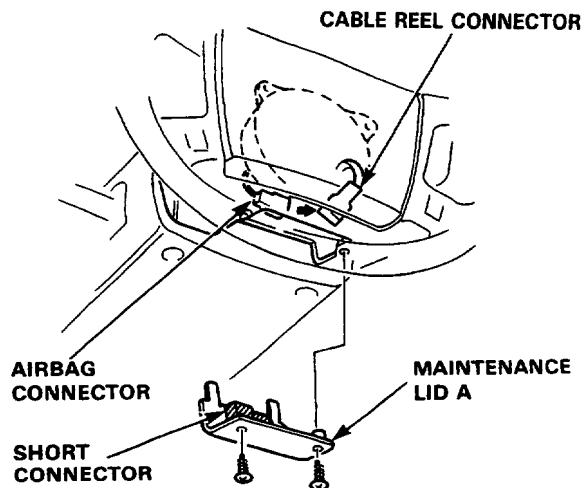

4. Connect the airbag 2-P connector and cable reel 2-P connector.
5. Attach the short connector to lid A and attach to the steering wheel.
6. Connect both the negative and positive cable to the battery.
7. After installing the airbag assembly, confirm proper system operation :

- Turn on the ignition to II : the instrument panel SRS light should go on for about 8 seconds and then go off.
- Confirm operation of horn buttons.
- Confirm operation of cruise control set/resume switch.