



Console

Replacement

SRS wire harness is routed near the console.



⚠ WARNING All SRS wire harness and connectors are colored Yellow. Do not use electrical test equipment on these circuit.

CAUTION: Be careful not to damage SRS wire harness when servicing the console and radio panel assembly.

Disassemble in numbered sequence.

NOTE:

- Lift up the parking brake lever.
- After removing the front console, disconnect the wire harness inside the console.
- Remove the front and rear consoles as an assembly.

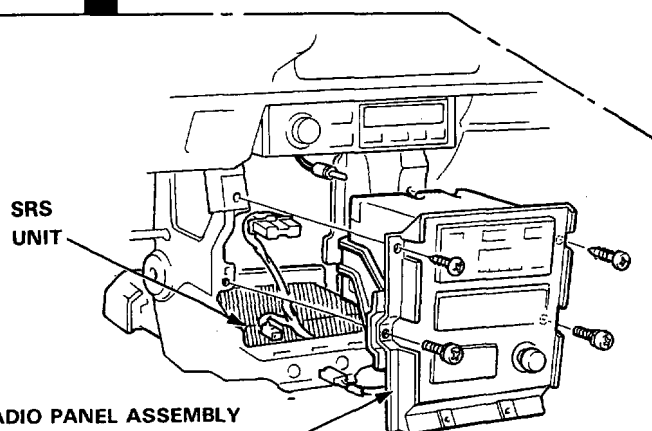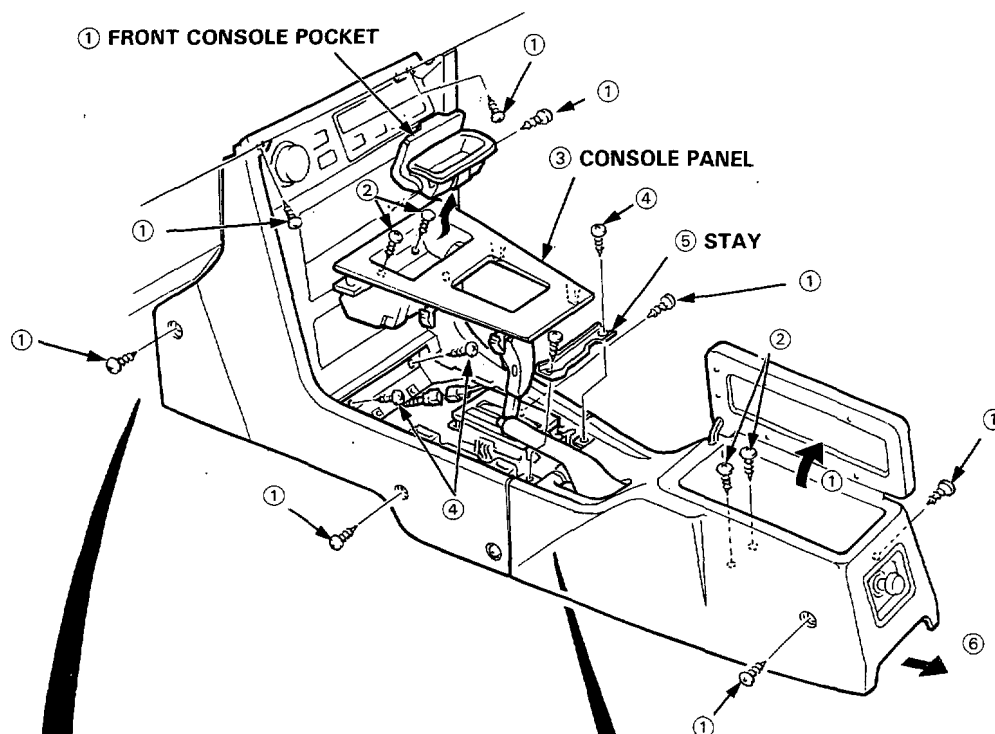

RADIO PANEL ASSEMBLY
Remove the 4 mounting screws.
Carefully remove the half-way dis-
connect the connector and antenna
cable.

