



SERVICE BULLETIN

QUALITY INFORMATION ANALYSIS

OVERSEAS SERVICE DEPT. MITSUBISHI MOTORS CORPORATION

SERVICE BULLETIN		No.: MSB-99E22-001	
	Date: 1999-11-15	<Model>	<M/Y>
Subject:	CHANGE IN POSITION OF PAINT MARKS ON M/T SHIFT AND SELSECT CABLE ASSEMBLY	GALANT(EA0)	97-10
Group:	MANUAL TRANSAXLE	Draft No.: 99AL021617	
INFORMATION	OVERSEAS SERVICE DEPT	 T.NITTA - VICE GENERAL MANAGER QUALITY INFORMATION ANALYSIS	

1. Description:


Paint marks on the M/T shift and select cable assembly have been changed in position in order for the marks to be more clearly seen after installation of the assembly has been done.

2. Applicable Manuals:

Manual	Pub. No.	Language	Page(s)
'97 GALANT Workshop Manual	PWDE9611	(English)	22-5
	PWDS9612	(Spanish)	
	PWDF9613	(French)	
	PWDG9614	(German)	
	PWDD9615	(Dutch)	
	PWDW9616	(Swedish)	

3. Effective Date:

From March 19, 1999

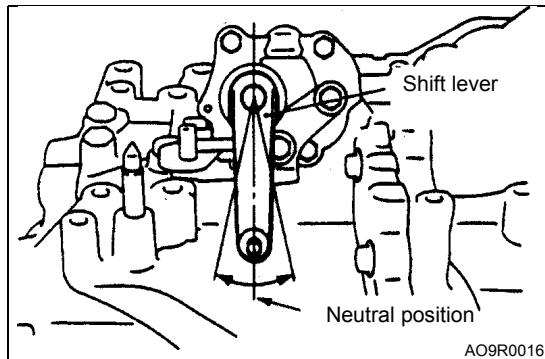


INSTALLATION SERVICE POINTS

► A ◀ SHIFT CABLE AND SELECT CABLE ASSEMBLY/SHIFT CABLE CONNECTION/SELECT CABLE CONNECTION

- Set the transmission side shift lever and the passenger compartment side shift lever to the neutral position.

<Old>

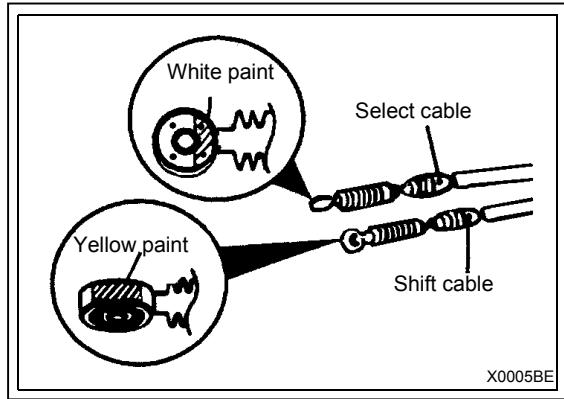

- For the transmission side, the white and yellow paint marks on the shift and select cable ends should face the snap pins.

- Move the shift lever to all positions and check that the operation is smooth.

<New>

Install the transmission side shift cable with its end painted yellow toward the body top end. Install the transmission side select cable with its end painted white toward the snap pin end.

↑
<Added>

► B ◀ NUT/SPRING WASHER/SHIFT KNOB INSTALLATION

- Screw in the nut all the way by hand, turn back half a turn, and then insert the spring washer.
- Screw in the shift knob until it touches the spring washer, and make one more turn. Then turn more to adjust the shift pattern on the shift knob.
- If the above steps are impossible, you can turn back the shift knob by one turn at most after screwing in all the way to adjust the shift pattern.