

[\[Previous\]](#) [\[Next\]](#)

Removal and Installation

note

Perform ADDITIONAL SERVICE WHEN REPLACING 8CH CAN GATEWAY. Refer to [Work Procedure](#) .

REMOVAL


1. Remove combination meter. Refer to the following.

- Full TFT meter: [Removal and Installation](#) 
- 7 inch information display: [Removal and Installation](#) 


2. Remove instrument lower panel LH. Refer to [Removal and Installation](#) .

3. Remove mounting screw .

- Without ethernet harness connector

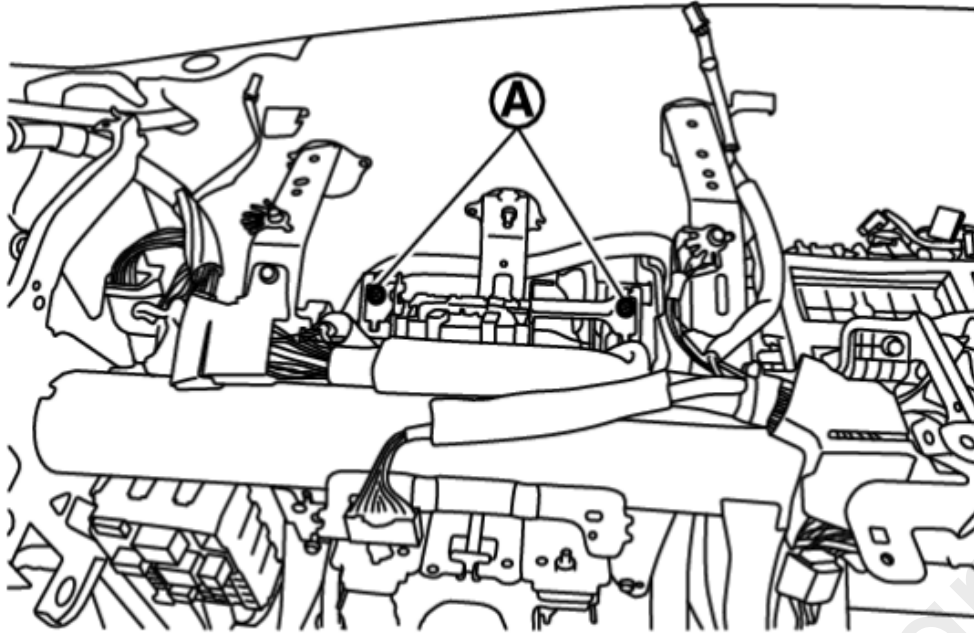


- With ethernet harness connector

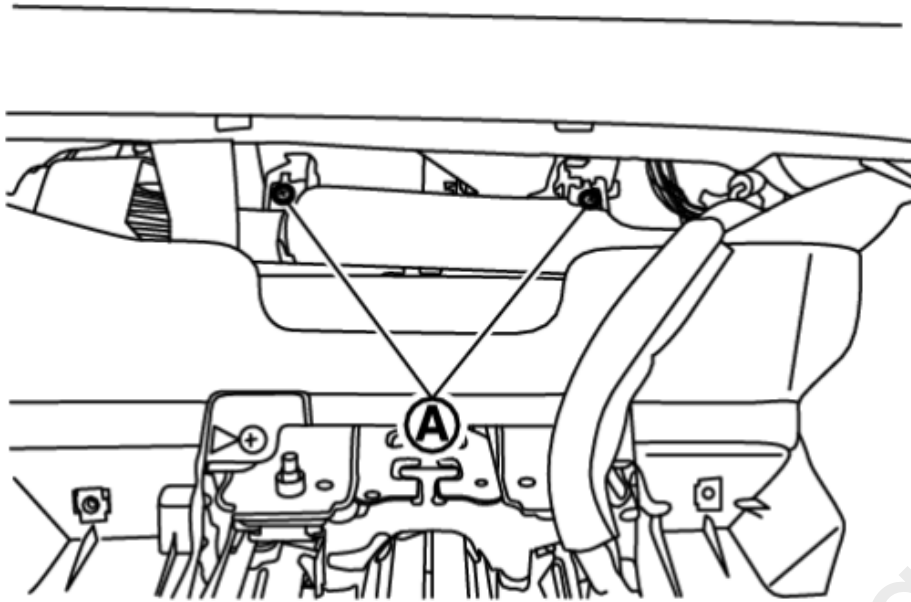


4. Remove harness connector^A to remove 8CH CAN gateway¹.

- Without ethernet harness connector

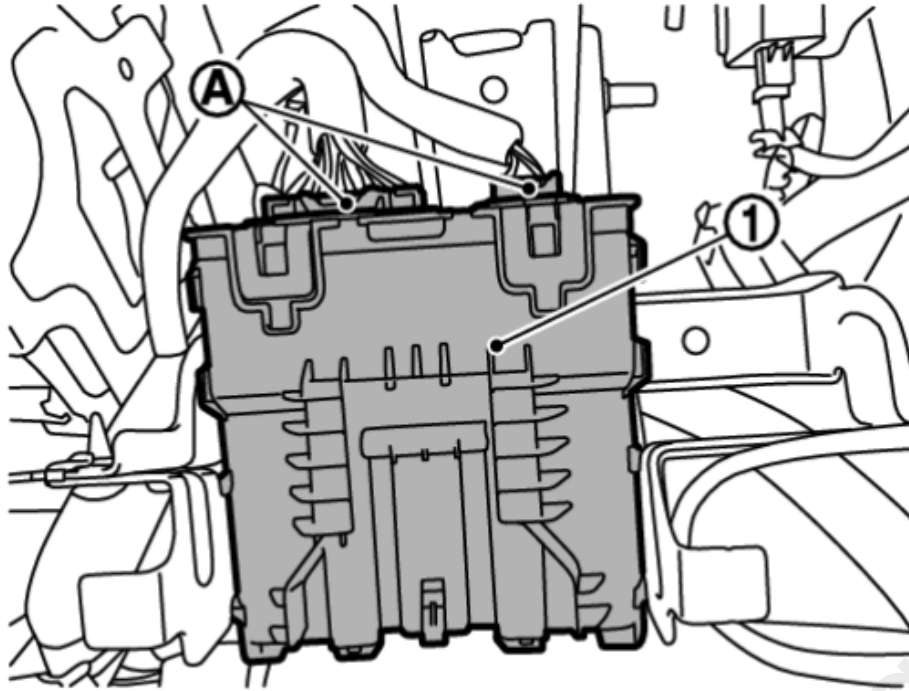

- With ethernet harness connector

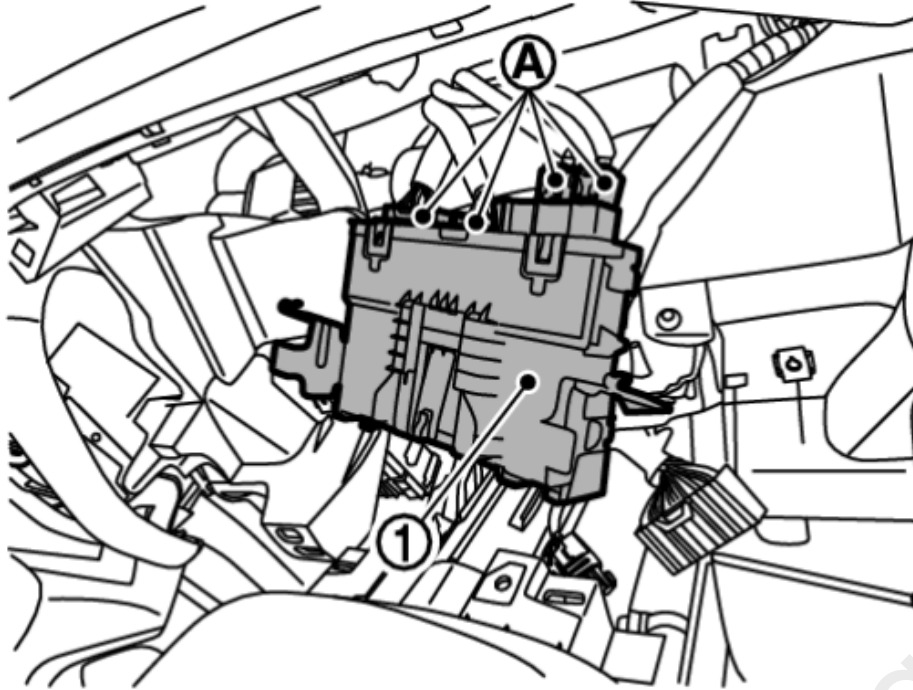

INSTALLATION

Install in the reverse order of removal.