


SECTION CL

MODIFICATION NOTICE:

- The ZD30DDTi engine model has been added.

CONTENTS


CLUTCH SYSTEM.....	1002	General Specifications.....	1004
HYDRAULIC CLUTCH CONTROL	1003	Inspection and Adjustment	1004
Clutch Operating Cylinder.....	1003		
SERVICE DATA AND SPECIFICATIONS			
(SDS).....	1004		

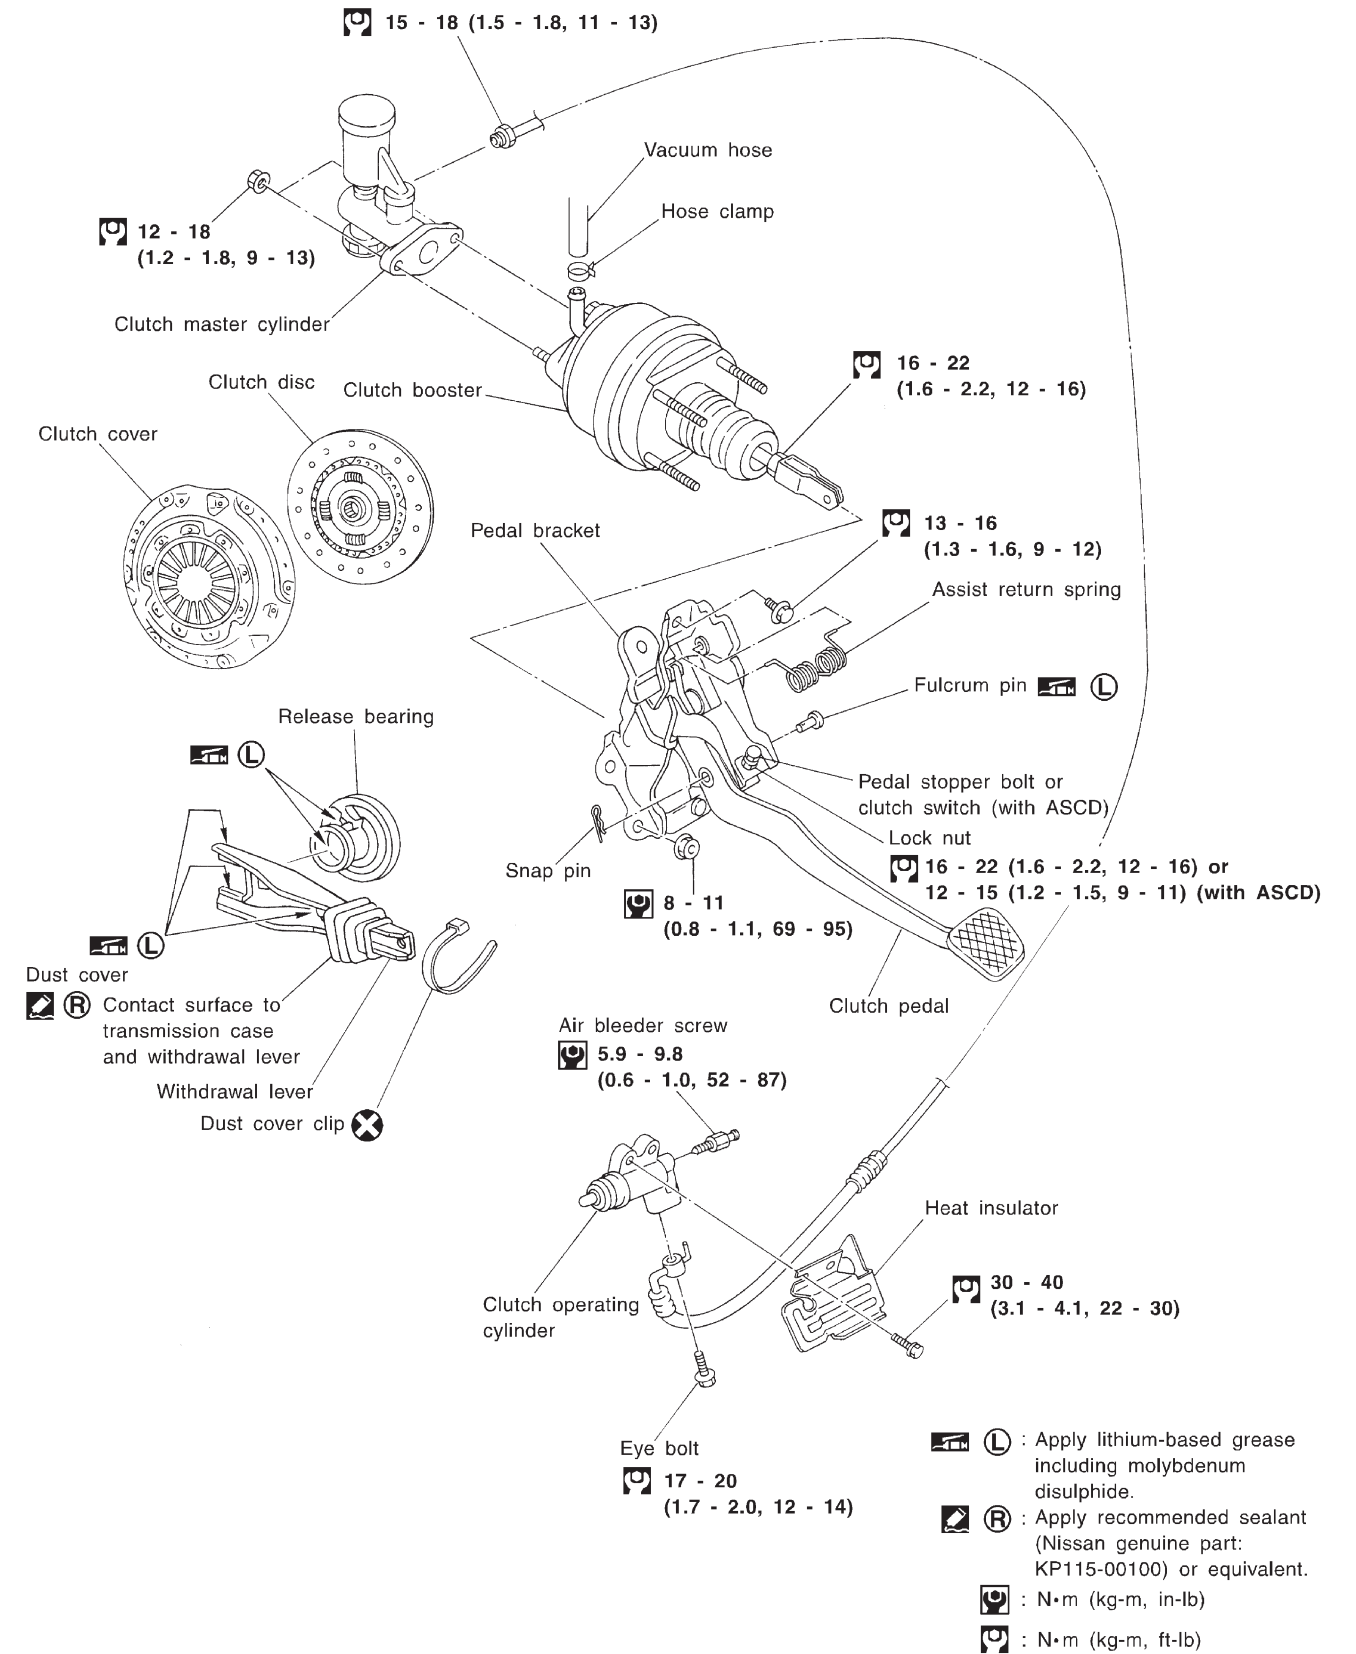

HYDRAULIC CLUTCH CONTROL

Clutch Operating Cylinder

SEC. 306
ZD30DDTi, engine

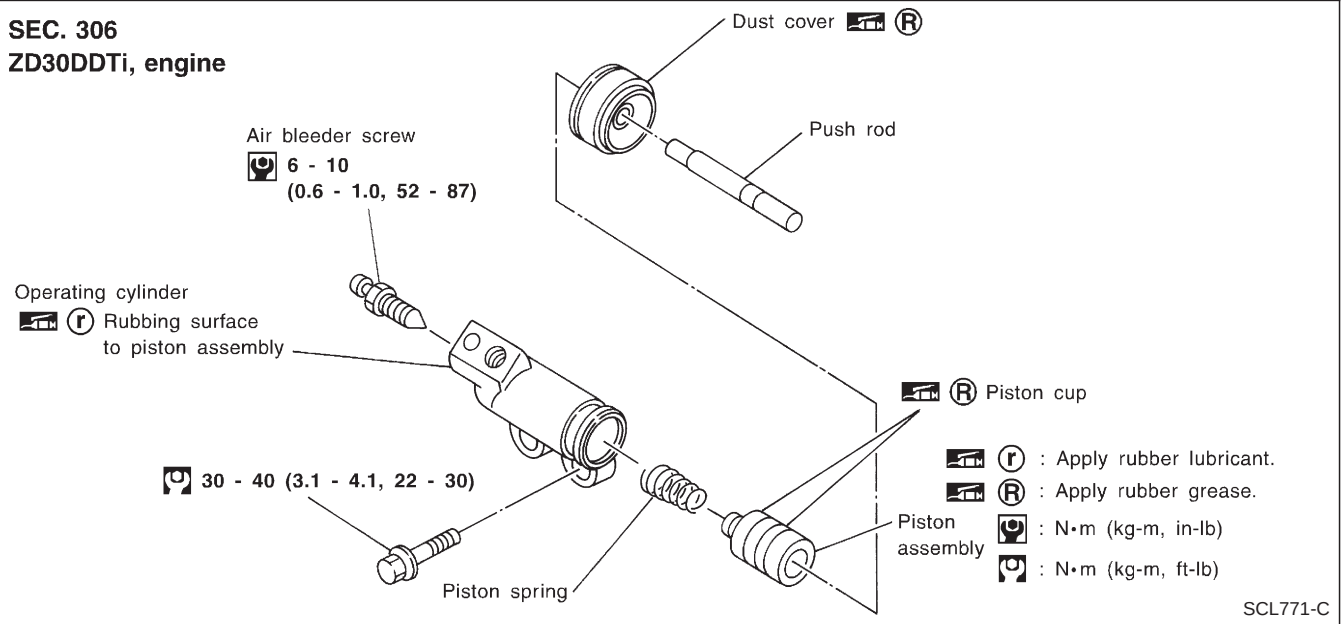

SERVICE DATA AND SPECIFICATIONS (SDS)

General Specifications

CLUTCH DISC

Model	275
Engine	ZD30DDTi
Facing size (Outer dia. x inner dia. x thickness) mm (in)	275 x 180 x 3.5 (10.83 x 7.09 x 0.138)
Thickness of disc assembly with load mm (in)/N (kg, lb)	7.7 - 8.3 (0.303 - 0.327)/ 7,846 (800, 1,764)

CLUTCH COVER

Body	Hardtop	Except Hardtop
Model	275	
Engine	ZD30DDTi	
Full load	N (kg, lb)	
	6,473 - 7,257 (660 - 740, 1,455 - 1,632)	7,355 - 8,336 (750 - 850, 1,654 - 1,874)

Inspection and Adjustment

CLUTCH PEDAL

Unit: mm (in)	
Pedal height "H"	ZD30DDTi
	195 - 205 (7.68 - 8.07)
Pedal free play "A" (at pedal pad)	1.0 - 3.0 (0.039 - 0.118)

*: Measured from surface of melt sheet to pedal pad