

SECTION **MA**

MODIFICATION NOTICE:

- SAE Viscosity Number charts for engine oil have been revised for Europe.
- Caution on the air cleaner filter installation for TB engine has been added.

CONTENTS

RECOMMENDED FLUIDS AND LUBRICANTS4002


SAE Viscosity Number4002

_____ **TB45E, TB48DE** _____

ENGINE MAINTENANCE.....4003

Cleaning and Changing Air Cleaner Filter.....4003


RECOMMENDED FLUIDS AND LUBRICANTS

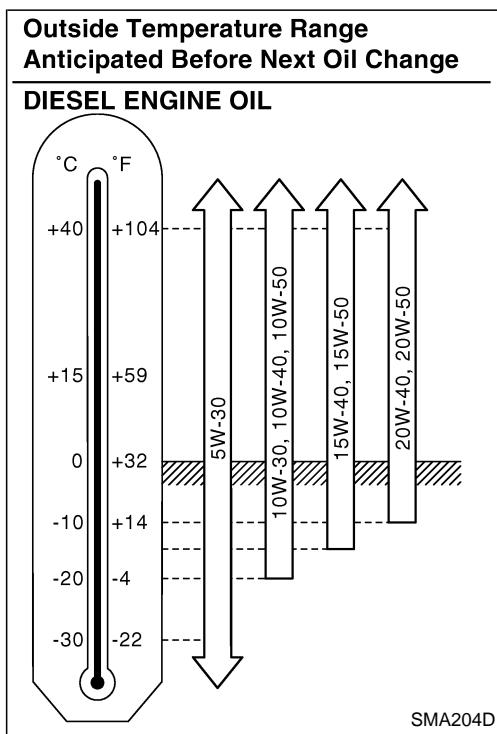

SAE Viscosity Number

DIESEL ENGINE

- 5W-30 is preferable. If 5W-30 is not available, select the viscosity from the chart, that is suitable for the outside temperature range.

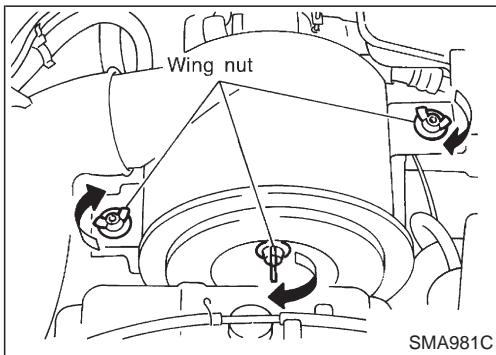

Cleaning and Changing Air Cleaner Filter

- To properly tighten wing nuts, position clamps at four places and tighten wing nuts until they touch air cleaner. Then tighten them three more turns by hand.

CAUTION:

- Do not use pliers or any other tools to tighten wing nuts.
- Clean inside air cleaner body when changing the element, or cleaning for dry paper type.