

SECTION TF

MODIFICATION NOTICE:

TX12A transfer model with gear component parts have been changed.



CONTENTS

MAJOR OVERHAUL	4002	Gear Components	4003
Case Components	4002		

MAJOR OVERHAUL

Case Components

SEC. 331

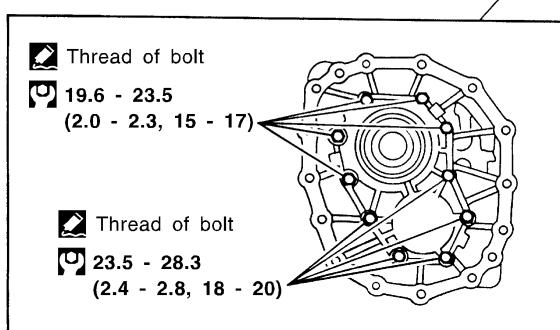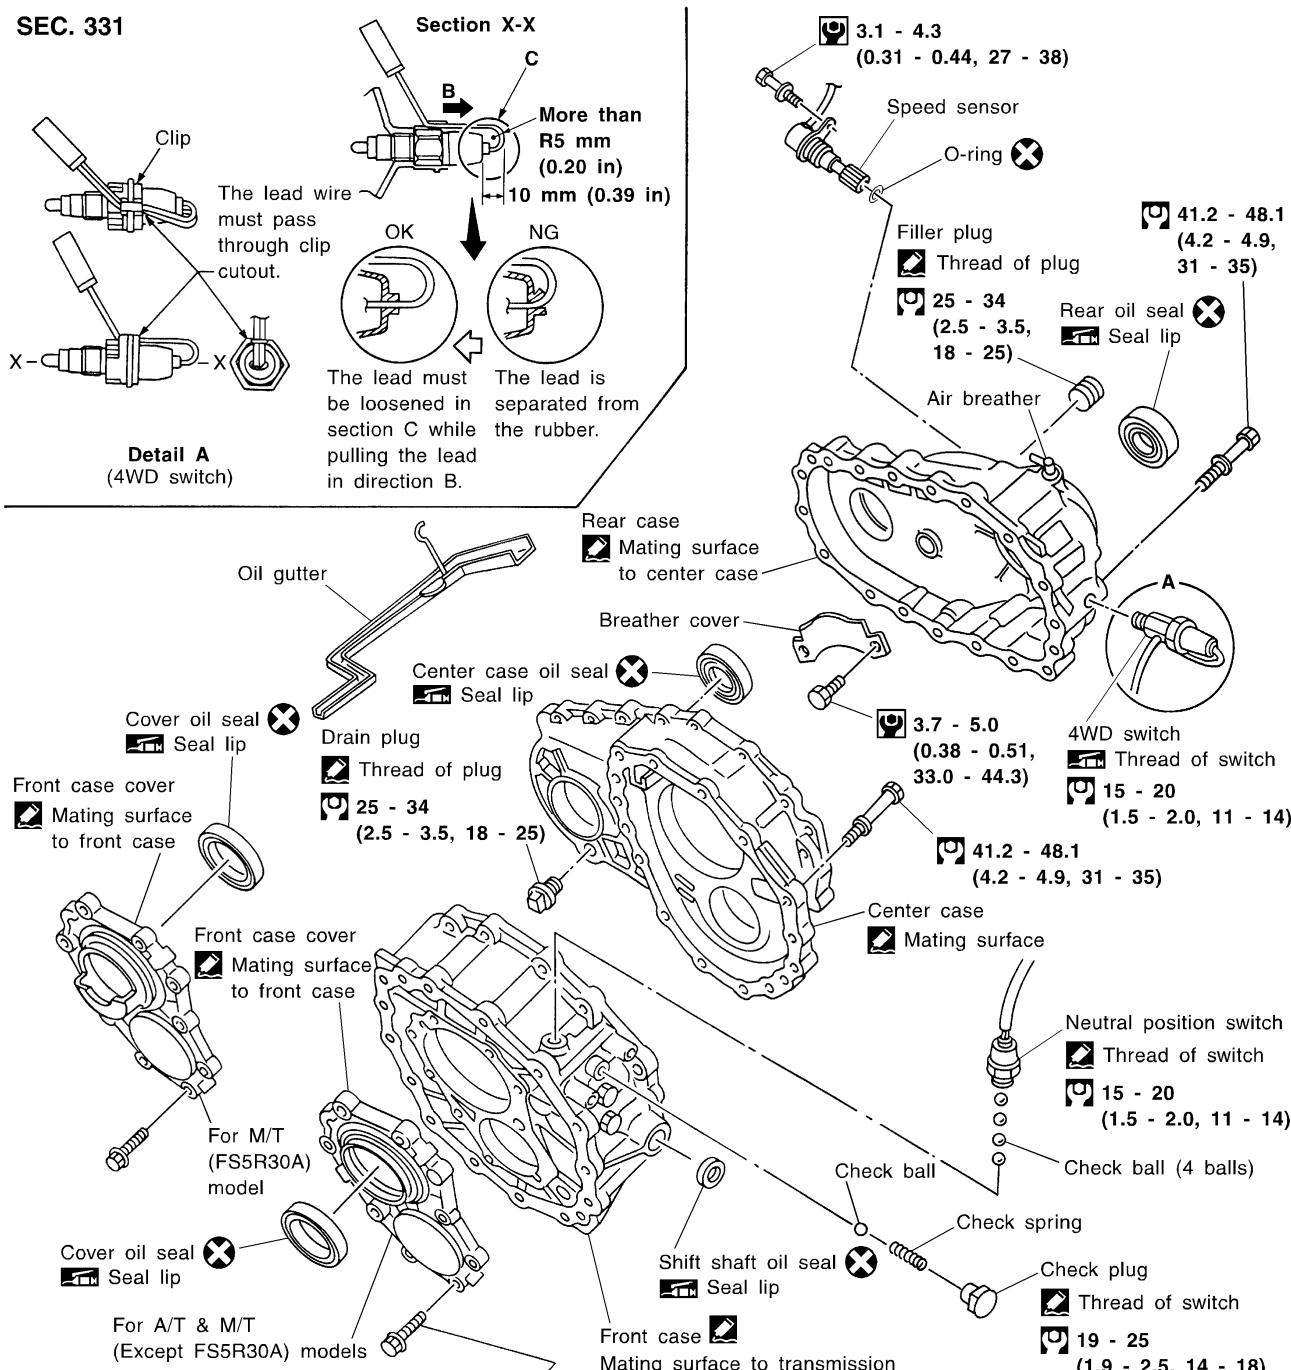


● : N·m (kg-m, in-lb)
● : N·m (kg-m, ft-lb)
● : Apply genuine anaerobic liquid gasket, Three Bond TB1215, Loctite Part No. 51813 or equivalent.

SMT098E

MAJOR OVERHAUL

Gear Components

SEC. 332

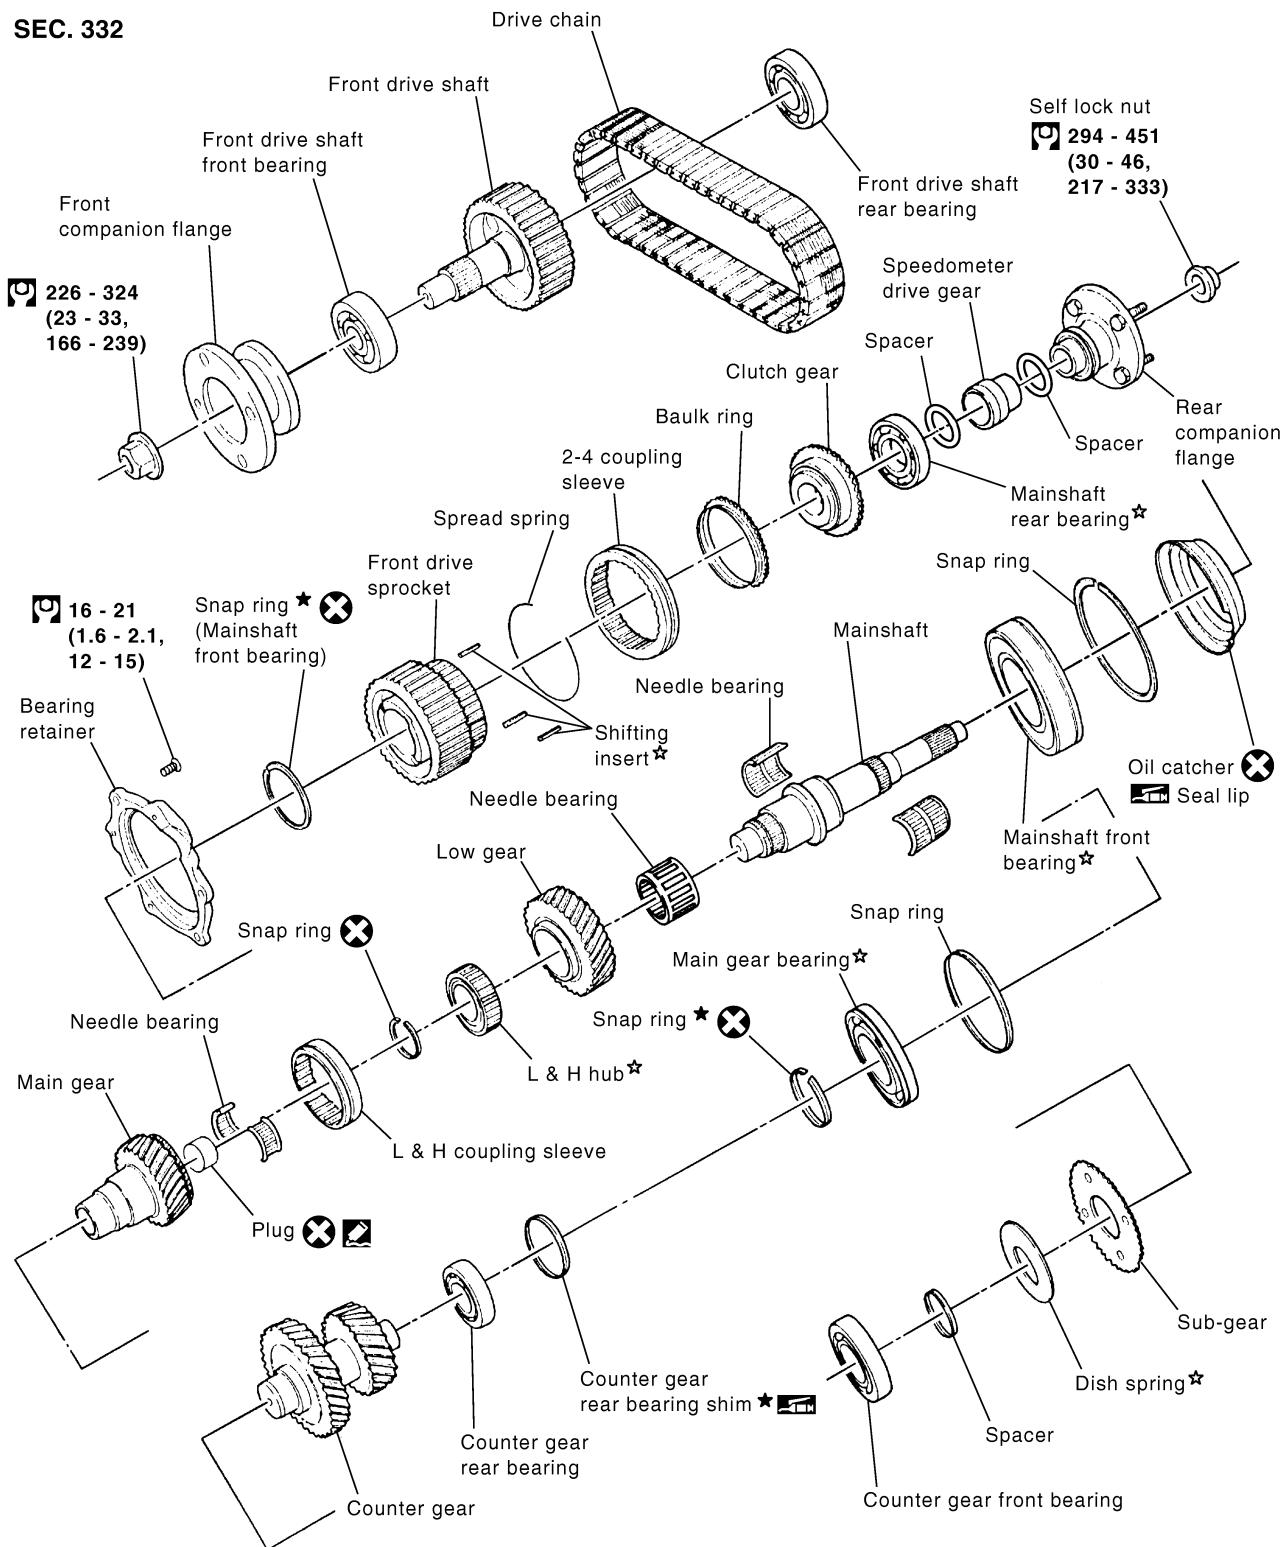

Apply gear oil to gears, shafts, synchronizers and bearings when assembling.

★ : Select with proper thickness.

Ⓐ : N•m (kg-m, ft-lb)

★ : Pay attention to its direction.

Ⓑ : Apply genuine anaerobic liquid gasket, Three Bond TB1215, Loctite Part No. 51813 or equivalent.