


8. Front Fender

A: REMOVAL AND INSTALLATION

- 1) Disconnect ground cable from battery.
- 2) Remove mud guard.
- 3) Remove parking light and headlight.
- 4) Remove front bumper face.
- 5) Remove side protector. (Front fender)
- 6) Remove attaching bolt then remove fender.

CAUTION:



Be careful not to scratch body panels with fender edges when removing it.

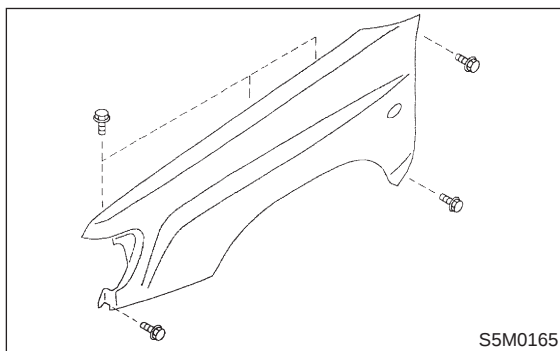

- 7) Installation is in the reverse order of removal.

NOTE:


Check for alignment of front fender with hood and front door with front fender at all points. Adjust, if necessary.

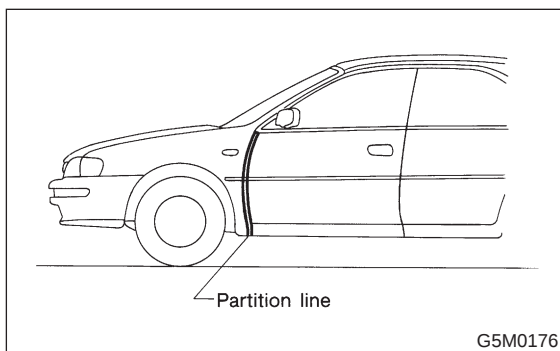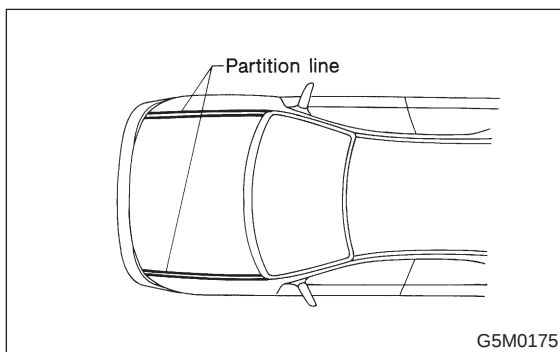

9. Mud Guard

A: REMOVAL AND INSTALLATION

- 1) Jack-up vehicle to remove tire.
- 2) Remove screws and clips. Move mud guard toward the center of the body and remove mud guard.

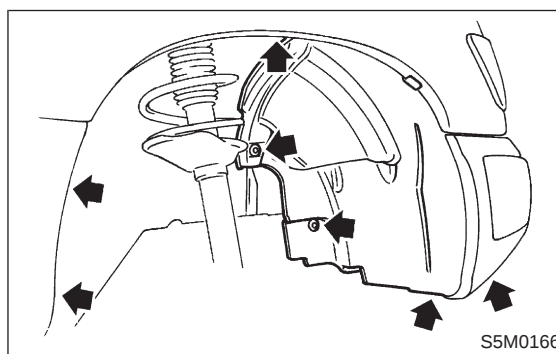

- 3) Installation is in the reverse order of removal.

CAUTION:

Only use new nuts and clips.