

11. Rear Accessory Power Supply Socket


A: WIRING DIAGRAM

<Ref. to WI-136, WIRING DIAGRAM, Rear Accessory Power Supply Socket System. >

B: REMOVAL


1. FRONT

- 1) Disconnect the ground cable from the battery.
- 2) Remove the console cover.
- 3) Disconnect the harness connector, and remove the accessory power supply socket.

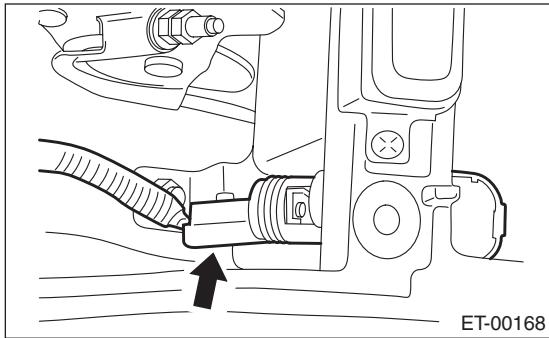

2. REAR

- 1) Disconnect the ground cable from the battery.
- 2) Remove the rear quarter lower trim.
- 3) Disconnect the harness connector, and remove the accessory power supply socket.

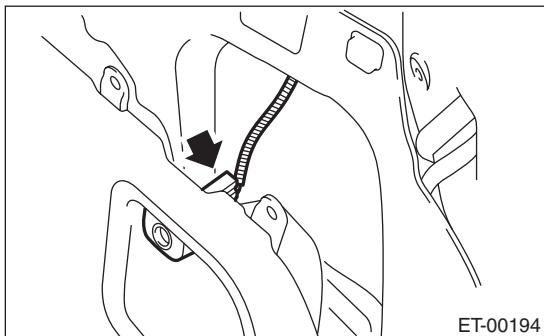

C: INSTALLATION

Install in the reverse order of removal.