


## 3. Radio Body

### A: REMOVAL

- 1) Disconnect the ground cable from the battery.
- 2) Remove the console front cover. <Ref. to EI-37, REMOVAL, Console Box.>
- 3) Affix the thick protective tape (A) to the instrument panel pad to protect the surface.

**NOTE:**


Affix the protective tape so that it covers the vertical wall in the back of the gap between the panel center and the pad.

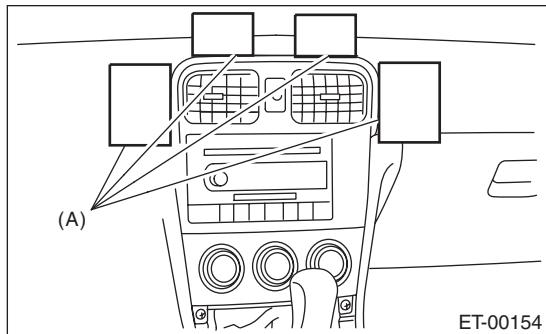

- 4) Remove the screws (B).
- 5) Insert a flat tip screwdriver etc. into the portion (C) to remove the claw.

**CAUTION:**

**Be very careful because it is possible to damage the instrument panel if the flat tip screwdriver is inserted into any other area than specified.**

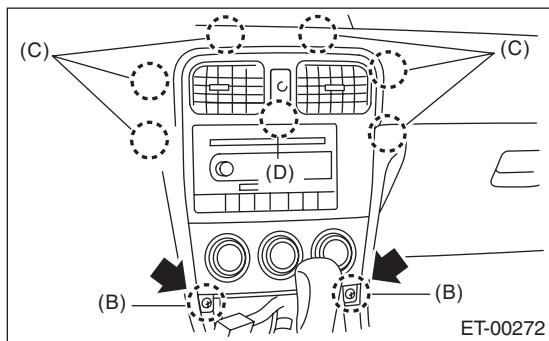

(B) Screw

(C) Clip

**NOTE:**

The claw can be easily removed by performing the work while pulling on the lower portion of the center console panel

- 6) Disconnect each connector.
- 7) Remove the fitting screws, and slightly pull the radio out from the center console.
- 8) Disconnect the harness connectors and antenna feeder cord.

### B: INSTALLATION

Install in the reverse order of removal.