


## 5. Scalp Cap


### A: REPLACEMENT

#### 1. OUTER MIRROR WITH SIDE TURN SIGNAL LIGHT


- 1) Remove the mirror. <Ref. to GW-14, REPLACEMENT, Outer Mirror.>
- 2) Press-in the upper side clips (A) from inside of outer mirror.

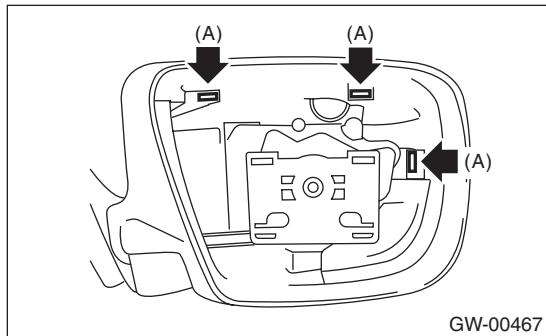

- 3) Pull the scalp cap forward of outer mirror, remove the upper side clips (A) and lower side hooks (B), and then remove the scalp cap.

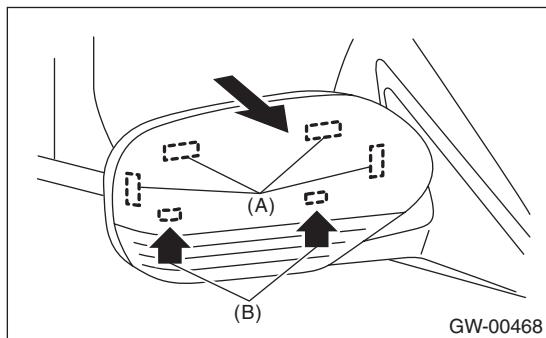

- 4) Insert the lower hooks (B) of scalp cap to the outer mirror and push the upper clips (A) in.

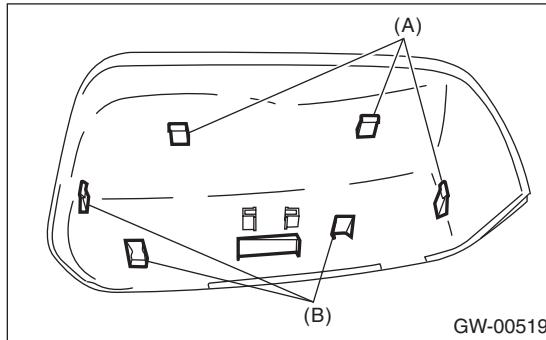


- 5) Install the scalp cap securely.

#### CAUTION:


**Do not remove the scalp cap forcibly. The lower hooks may be damaged.**

### 2. STANDARD SIZE OUTER MIRROR

- 1) Put the mirror side down.
- 2) Insert a thin screw driver, push the clip part of scalp cap, and then remove the scalp cap.

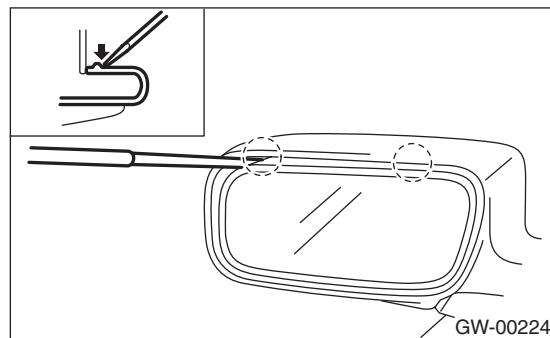

- 3) Insert the claw at the lower side of scalp cap to the door mirror.

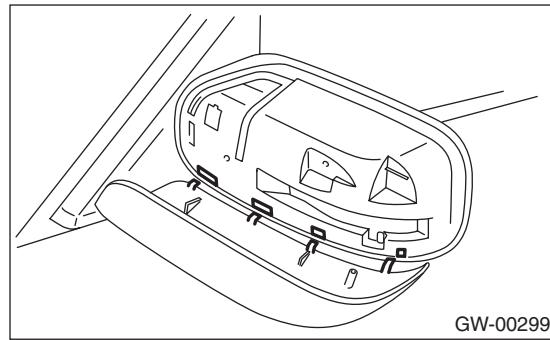

- 4) Install the scalp cap securely.