


3. Sunroof Lid

A: REMOVAL

- 1) Completely close the sunroof lid, and then open the sunshade.
- 2) Remove the four covers (A), and then remove the eight nuts.

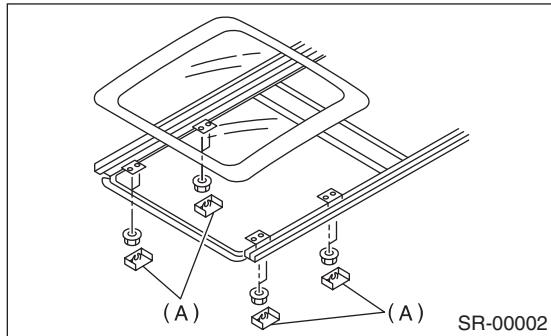

- 3) Remove the sunroof lid carefully.

B: INSTALLATION


Install in the reverse order of removal.

C: ADJUSTMENT

Align the height between sunroof lid and roof panel. Loosen the sunroof lid nuts, and then adjust the height by adding (max: four pieces) or extracting (min: zero pieces) shims (normally two pieces) which are installed between the sunroof lid and the roof panel.

Difference of height between sunroof lid and roof panel:

$2.0 \pm 1.0 \text{ mm (} 0.079 \pm 0.039 \text{ in)}$

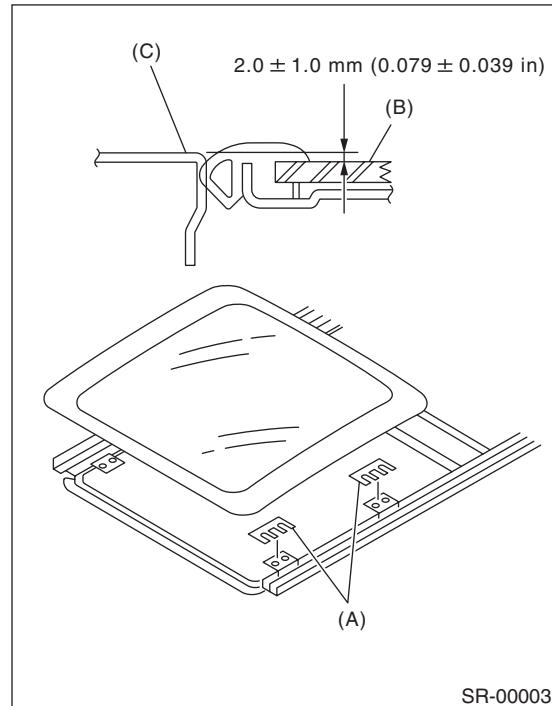

(A) Shim

(B) Sunroof lid

(C) Roof panel