


15. Front Accessory Power Supply Socket

A: WIRING DIAGRAM

Refer to "Front Accessory Power Supply Socket System" in the wiring diagram. <Ref. to WI-250, WIRING DIAGRAM, Front Accessory Power Supply Socket System.>

B: REMOVAL

- 1) Disconnect the ground cable from battery.
- 2) Remove the front accessory power supply socket.
 - (1) Disconnect the connector.
 - (2) While releasing the claw inside the accessory power supply socket, press in the claw from the rear to remove the accessory power supply socket.

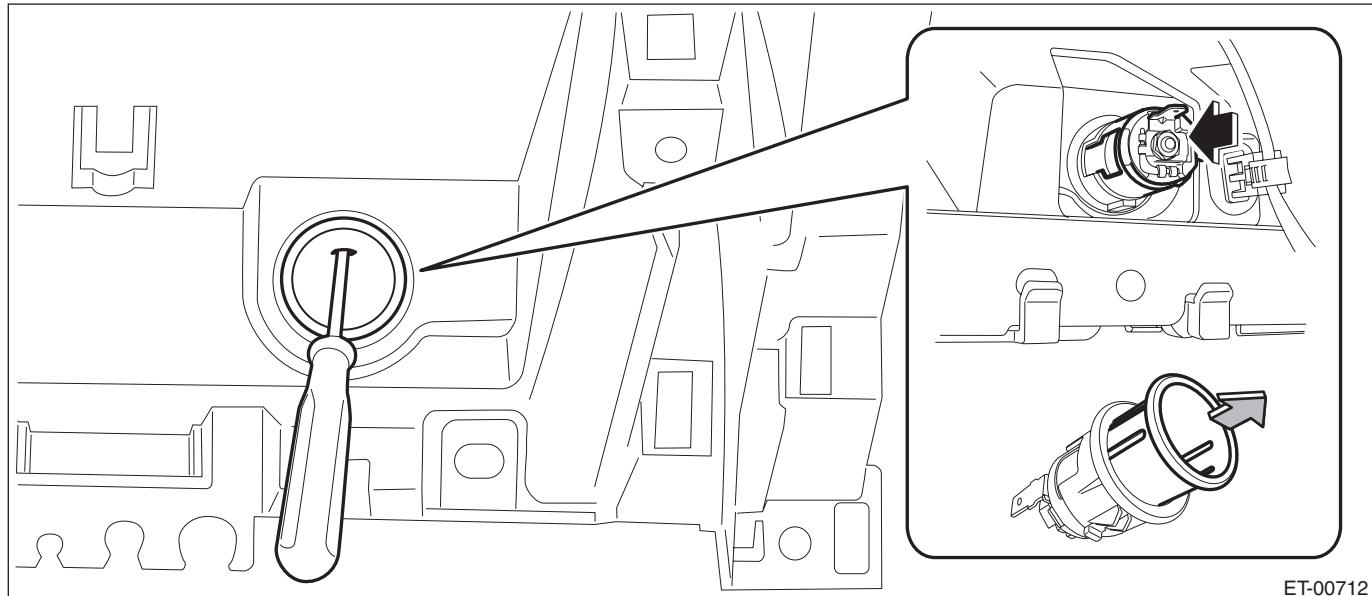

NOTE:

If it is hard to remove, remove the panel center assembly and then release the claws from behind.

C: INSTALLATION

Install each part in the reverse order of removal.

NOTE:

Align the grooves of the holder with the claws of accessory power supply socket.

