


## 16. Rear Accessory Power Supply Socket

### A: WIRING DIAGRAM

Refer to "Rear Accessory Power Supply Socket System" in the wiring diagram. <Ref. to WI-349, WIRING DIAGRAM, Rear Accessory Power Supply Socket System.>

### B: REMOVAL

- 1) Disconnect the ground cable from battery.
- 2) Open the console box, and remove the rear accessory power supply socket.
  - (1) While releasing the claw inside the accessory power supply socket, pull it toward you to remove the accessory power supply socket.
  - (2) Disconnect the connector, and remove the accessory power supply socket and holder.

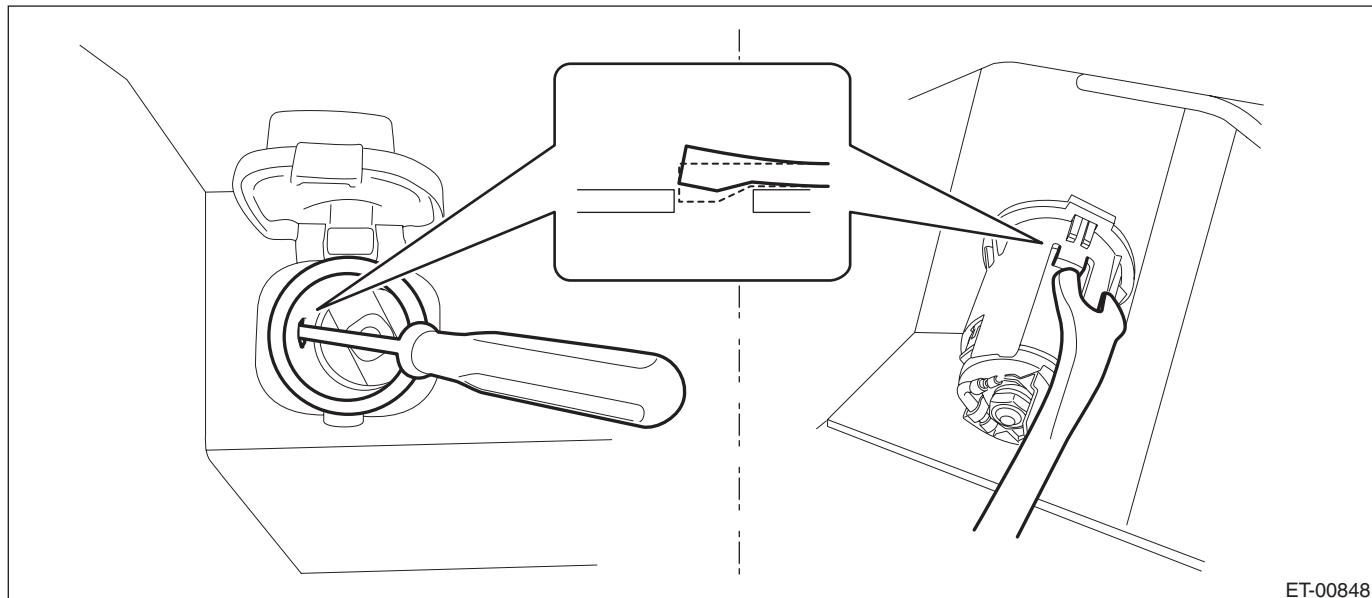

#### NOTE:

If it is hard to remove, remove the console box assembly and then release the claws from behind.

### C: INSTALLATION

Install each part in the reverse order of removal.

#### NOTE:

Align the grooves of the holder with the claws of accessory power supply socket.

