

8. Power Amplifier

A: REMOVAL

NOTE:

harman/kardon® audio system only.

- 1) Disconnect the ground cable from battery.


NOTE:

For the power seat, move the seat before removing the battery ground terminal.

- 2) Move the seat on the LH side to the front-most position.

- 3) Remove the power amplifier assembly.

- (1) Disconnect the connector.
- (2) Remove the nut and remove the power amplifier assembly.

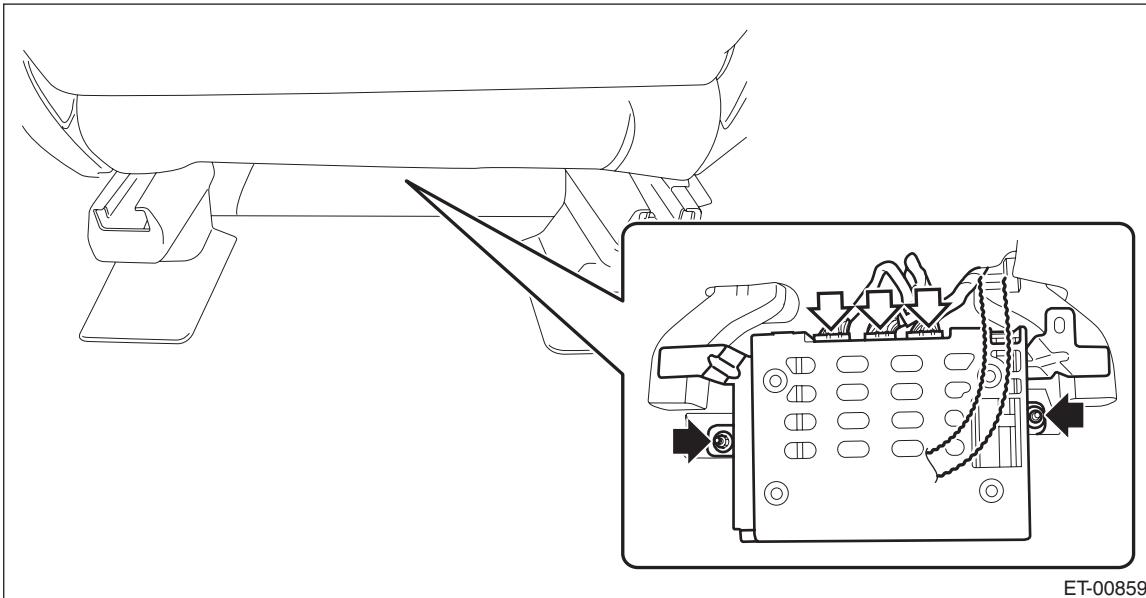

B: INSTALLATION

Install each part in the reverse order of removal.

Tightening torque:

Power amplifier: 4.5 N·m (0.46 kgf·m, 3.32 ft-lb)