


## 39. Reflex Reflector

### A: REMOVAL

From behind the bumper face - rear, release the nuts and claws and remove the reflex reflector assembly.

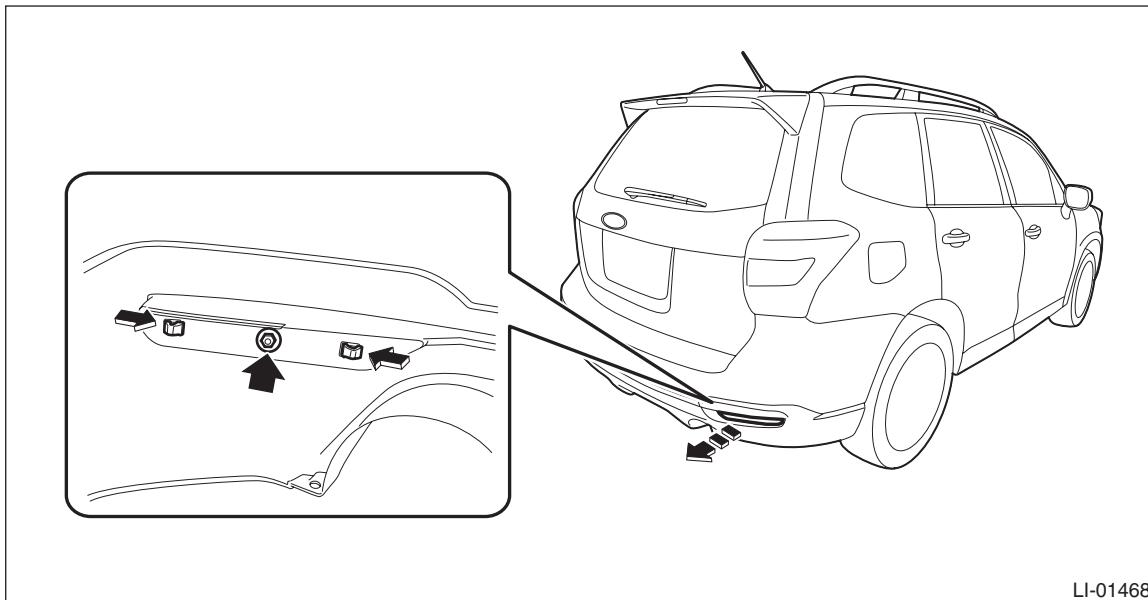

### B: INSTALLATION

Install each part in the reverse order of removal.