


39. Reflex Reflector

A: REMOVAL

From behind the bumper face - rear, release the nuts and claws and remove the reflex reflector assembly.

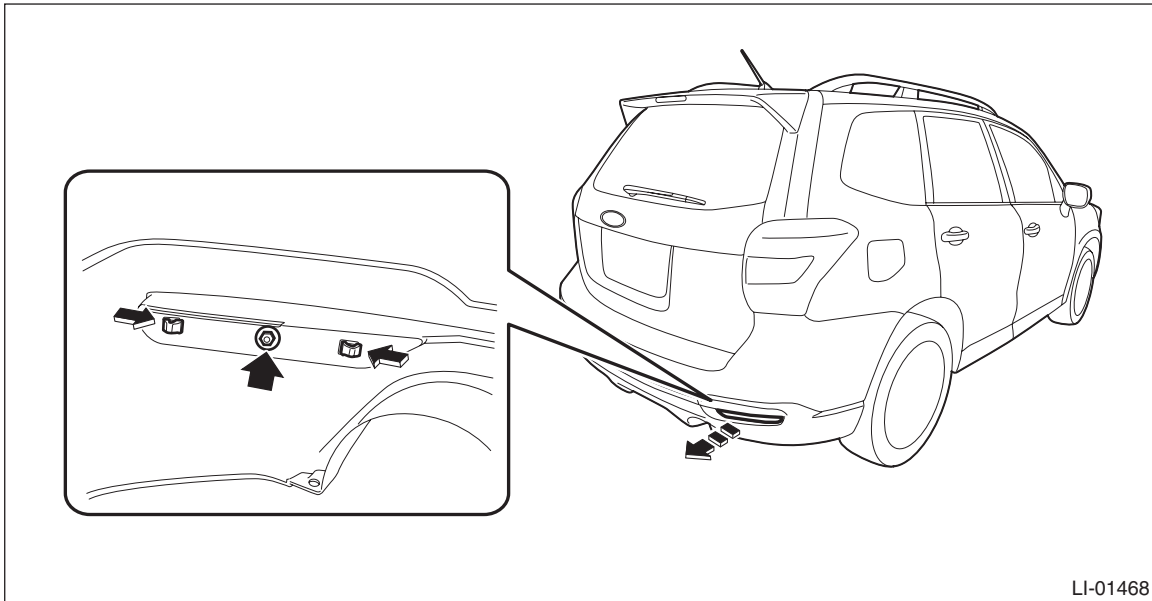

LI-01468

B: INSTALLATION

Install each part in the reverse order of removal.