

5. Cruise Control Command Switch

S912497


A: REMOVAL

S912497A18

CAUTION:


Before starting operation carefully read the notes given in "AB" section for proper handling of the airbag module. <Ref. to AB-7 CAUTION, Driver's Airbag Module.>

- 1) Set front wheels in straight ahead position.
- 2) Turn ignition switch OFF.
- 3) Disconnect battery ground cable from battery and wait for at least 20 seconds before starting work.
- 4) Using TORX® BIT T30 (Tamper resistant type), remove two TORX® bolts which secure driver's airbag module.

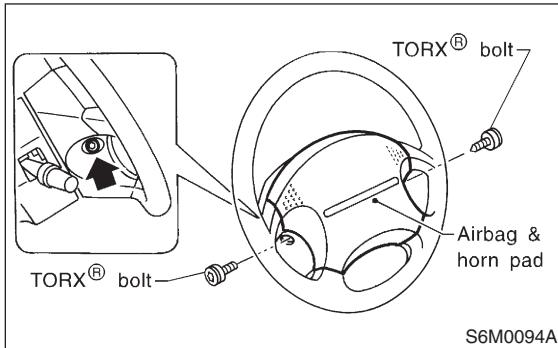


- 5) Disconnect airbag module connector on back of airbag module.

- 6) Remove horn switch from steering wheel as shown.

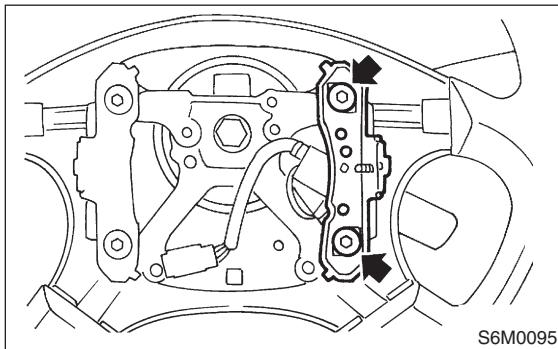

- 7) Disconnect horn and cruise control command switch connector, then remove cruise control command switch.

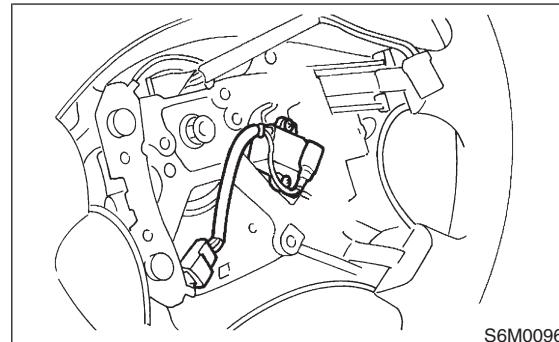

B: INSTALLATION

S912497A11

Install in the reverse order of removal.