



3. Cruise Control Module S912500

A: REMOVAL S912500A18

- 1) Remove front pillar lower trim.

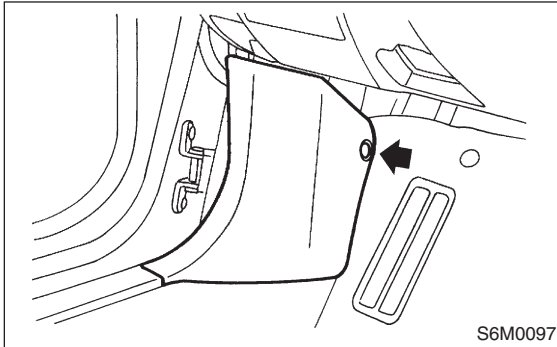

- 2) Disconnect connector from cruise control module.
- 3) Remove bolt, then remove cruise control module.

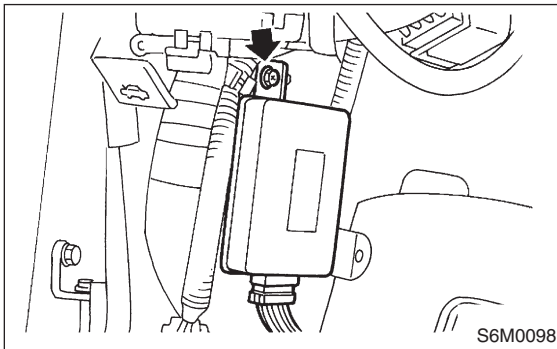

B: INSTALLATION S912500A11

Install in the reverse order of removal.