


1. Radio Body S901469

A: REMOVAL S901469A18

- 1) Remove console box. <Ref. to EI-24
REMOVAL, Console Box.>
- 2) Remove AT cover (AT model).
- 3) Remove center panel.
- 4) Remove fitting screws, and slightly pull radio out from center console.

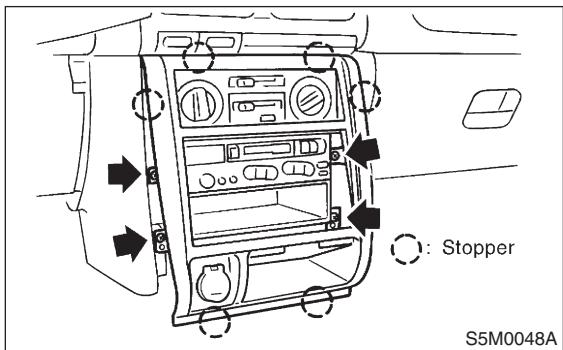

- 5) Disconnect electric connectors and antenna feeder cord.

B: INSTALLATION S901469A11

Install in the reverse order of removal.