


9. Door Trim S911614


A: REMOVAL S911614A18

1) Press retainer spring (A) with a thin flat-bladed screwdriver and then remove regulator handle (B). (models without power window)

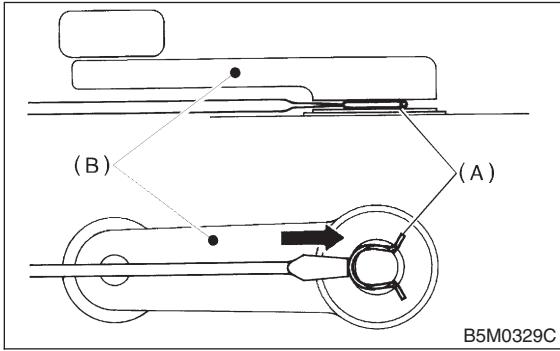

2) Using ST, disengage the clip.


ST 925580000 PULLER

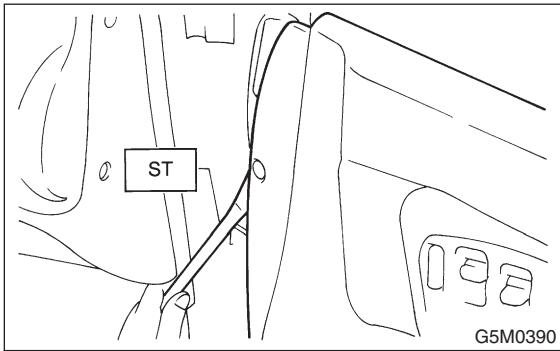

3) Remove gusset cover (C) and screws.
4) Remove trim panel and then disconnect connector. (models with power window)

CAUTION:

Be careful not to break clip by applying undue force.

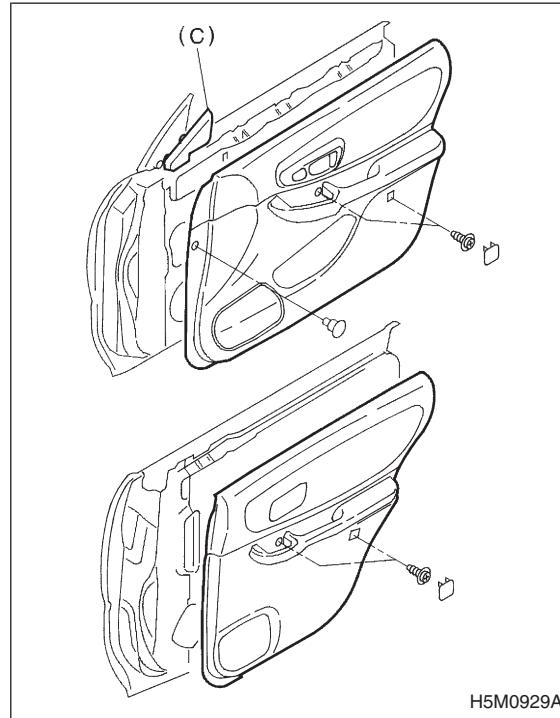

B: INSTALLATION S911614A11

Install in the reverse order of removal.