


4. Rear Bumper S911370


A: REMOVAL S911370A18

1. SEDAN S911370A1801


- 1) Open trunk lid. Remove trunk trim panel clips and detach trim.
- 2) Disconnect license plate light connector.
- 3) Remove bolts from side of bumper.

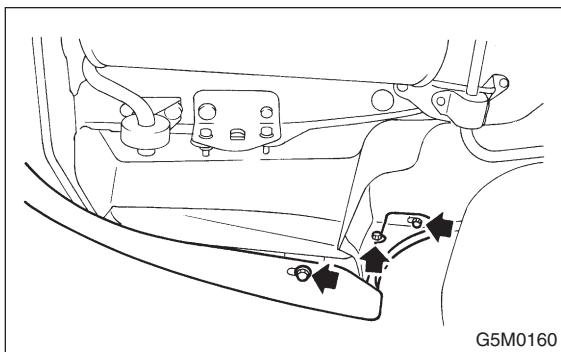

- 4) Remove bolts from bumper stay.

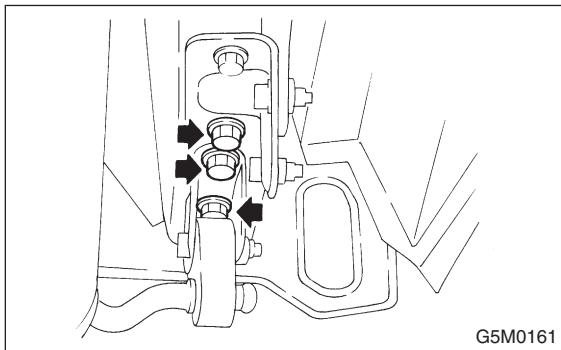

- 5) Remove rear bumper.

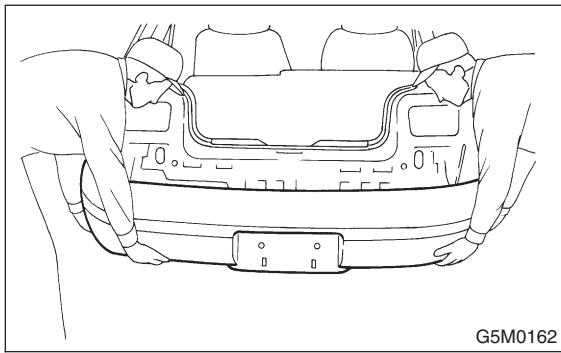

2. WAGON S911370A1802

- 1) Open rear gate and rear quarter trim lid.
- 2) Disconnect license plate light connector.
- 3) Remove bolts from side of bumper.
- 4) Remove bolts from bumper stays.
- 5) Remove bumper assembly.

B: INSTALLATION S911370A11

1. SEDAN S911370A1101


Install in the reverse order of removal.

CAUTION:

- Be extremely careful to prevent scratches on bumper face as it is made of resin.
- Be careful not to scratch the body when removing or installing bumper.

NOTE:

To facilitate installation of rear bumper, attach hook (located at stay) to body panel.

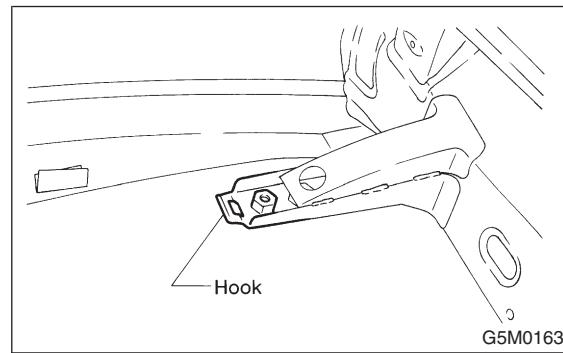

2. WAGON S911370A1102


Install in the reverse order of removal.

CAUTION:

- Be extremely careful to prevent scratches on bumper face as it is made of resin.
- Be careful not to scratch the body when removing or installing bumper.

NOTE:

To facilitate installation of rear bumper, attach hook (located at stay) to body panel.

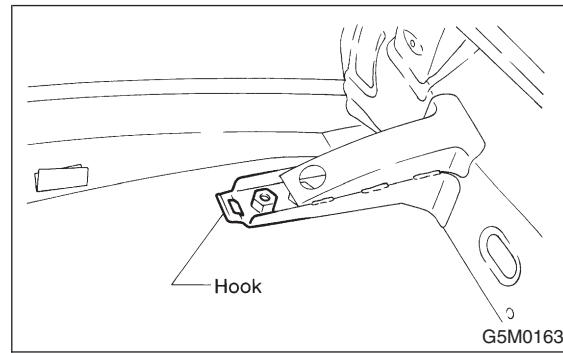

C: REPAIR S911370A19

Refer to front bumper repair. <Ref. to EI-11
REPAIR, Front Bumper.>