

6. Rear Gate Glass S905376

A: REMOVAL S905376A18

NOTE:

It is impossible to remove the molding from the glass. If molding is broken, replace rear glass.

- 1) Remove rear wiper and rear gate trim.
- 2) Disconnect connector from rear defogger terminal.
- 3) Remove high mount stop light.
- 4) Remove glass in same manner as for windshield. <Ref. to GW-17 REMOVAL, Windshield Glass.>

CAUTION:



Be careful not to damage molding re-installing the old rear window glass using a piano wire.

B: INSTALLATION S905376A11

- 1) Install rear gate trim.
- 2) Install glass in same manner as windshield. <Ref. to GW-18 INSTALLATION, Windshield Glass.>

NOTE:

A matching pin is cemented to corners of glass on compartment side. Use a piano wire when cutting each pin.

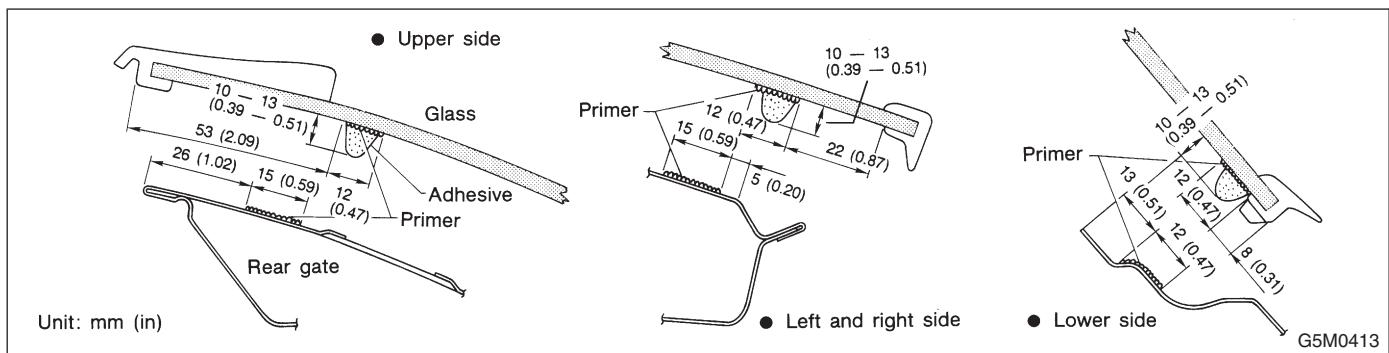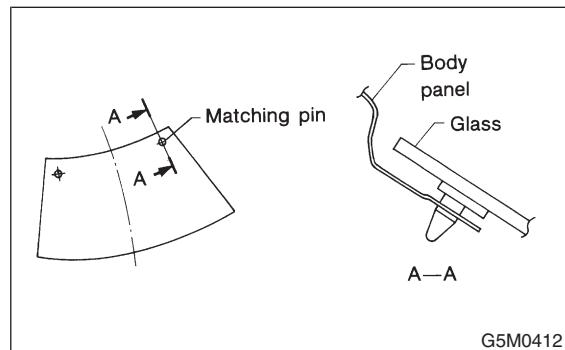

- 3) About one hour after installation, test for water leakage. Leave vehicle for 24 hours before using it.
- 4) Connect rear defogger connections.
- 5) Install high mount stop light and rear wiper.