


## 8. Rear Window Glass

S905454A14

### A: REMOVAL


S905454A18

- 1) Remove roof molding.
- 2) Remove rear window molding upper and lower.
- 3) Disconnect connector from rear defogger terminal.
- 4) Remove glass in same manner as in windshield. <Ref. to GW-17 REMOVAL, Windshield Glass.>

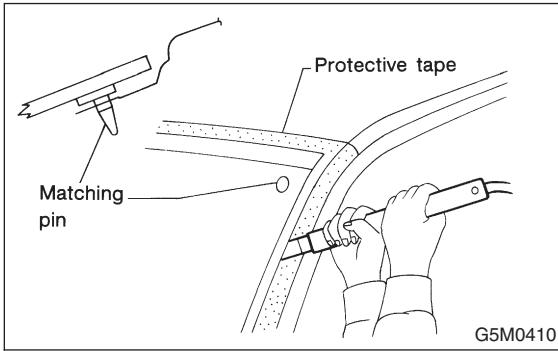

#### NOTE:


A matching pin is cemented to the corners of glass on compartment side. Use a piano wire when cutting each pin.

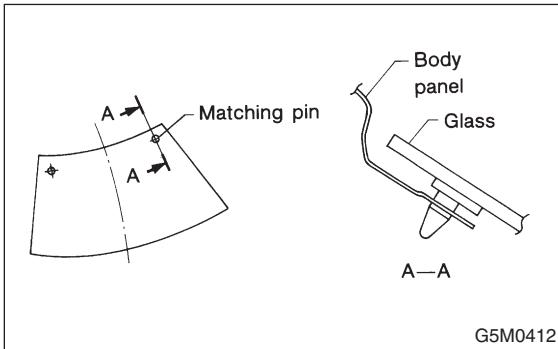

### B: INSTALLATION

S905454A11

- 1) Install glass in same manner as in windshield. <Ref. to GW-17 INSTALLATION, Windshield Glass.>
- 2) Firstly, press-fit molding upper, then lower and lastly, roof molding.

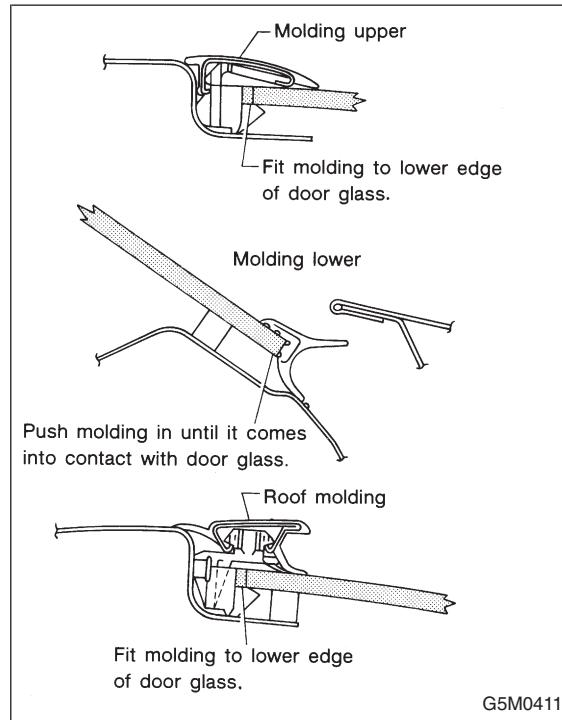

- 3) After installation, test for water leakage after about one hour, and leave vehicle alone for 24 hours.

- 4) Make rear defogger connections.