



6. Front Fog Light Assembly S914427A27

A: REMOVAL S914427A18

- 1) Disconnect ground cable from battery.
- 2) Remove front fog light cover.

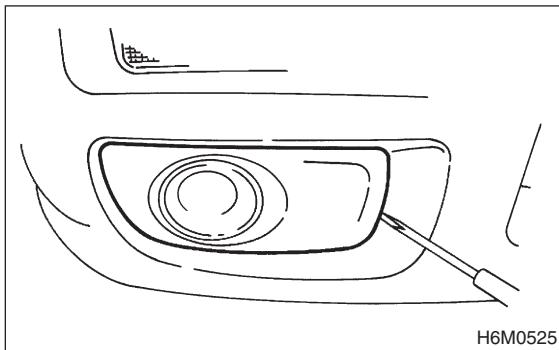

- 3) Remove the two screws, then draw out the front fog light from front bumper.

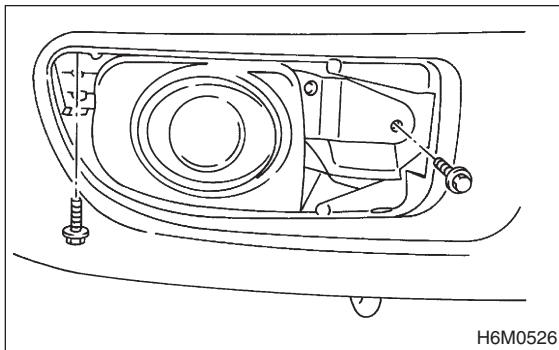

- 4) Disconnect the connector.

B: INSTALLATION S914427A11

Install in the reverse order of removal.